




RoHS Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

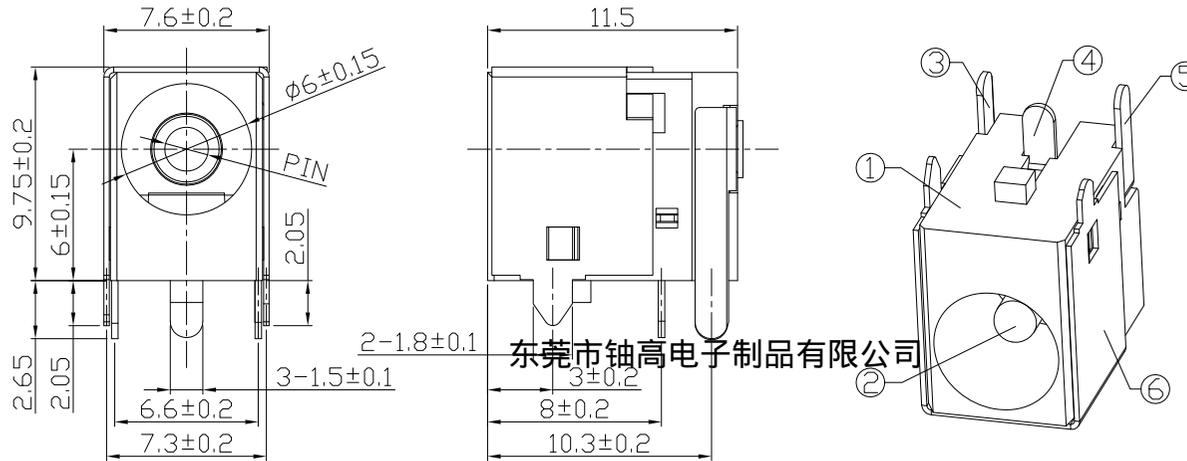

东莞市铀高电子制品有限公司

MODEL CODE:

DCB0-0036B- A □ PB BK S 0 4

(1) (2) (3)(4) (5) (6) (7)(8) (9)

(1):Series type:DIP DC POWER JACK.

(2):Series No.

(3):Schematic option: A , B

(4):Center pin diameter:

G=Ø1.65 , H=Ø2.0 , I=Ø2.35 , J=Ø2.5

(5):Material of housing:

PB=PBT (Standard)

(6):Housing color:

BK=Black

(7):Terminal plating

S=Silver(Ag)

(8):Special option:

0=No special option

(9):Packing mode:

4=Bag packing

SPECIFICATION:

1.Rating : DC 20V 3A;

2.Contact resistance: ≤30mΩ;

3.Insulation resistance: ≥100MΩ (DC250V);


4.Withstand voltage: 500VAC ;

5.Insertion and extraction force: 3-30N;


6.life test: 5,000 cycles;

7.Operation temperature range:-20°C~70°C;

8.Preservative temperature range:-40°C~85°C;

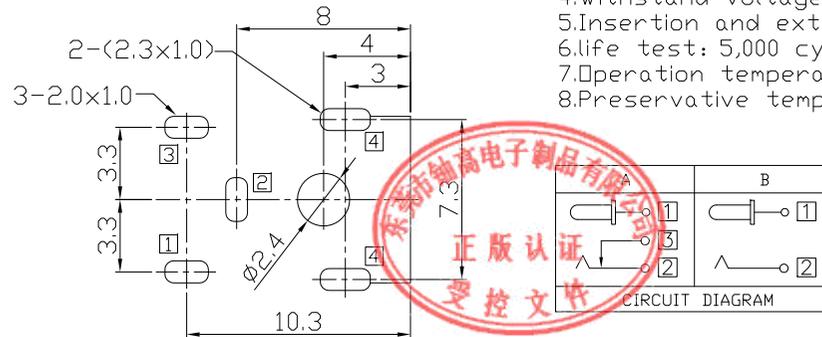

PCB HOLES(BOTTOM VIEW) t=1.6mm
NOTE:GENERAL TOLERANCE:±0.05mm



DC MATE PLUG

Model No.	G	H	I	J
CENTER PIN	Ø1.65	Ø2.0	Ø2.35	Ø2.5
DC MATE PLUG	Ø4.0	Ø5.5	Ø5.5	Ø5.5

○: ITEM NO. □: TERMINAL NO.

NO.	PARTS	MATERIAL	Q'TY	FINISHING	TOLERANCE	ANGLES	UNITS							
⑥	Shield plate	④ Brass t=0.25	1	Nickel(Ni) Plating			mm							
⑤	Shunt terminal	③ Brass t=0.3	1	Silver(Ag) Plating	±0.3	±2'	MAT'L							
④	Tip spring	② SUS301 t=0.3	1	Silver(Ag) Plating			SEE NOTE	TITLE:	PART NO.:					
③	Center pin terminal	① Brass t=0.3	1	Silver(Ag) Plating			FINISH	DIP DC POWER JACK	DCB0-0036B					
②	Center pin	① Brass	1	Nickel(Ni) Plating			SEE NOTE	DR:	Ricky 2019/04/12		DWG NO.:	AB0-0036B		
①	Housing	PBT UL94V-0	1				Q'TY	CHKD:	Ricky 2019/04/12		SCALE	SHEET	REV.	CUSTOMER
								APPD:			1:1	1/1	A	DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.