

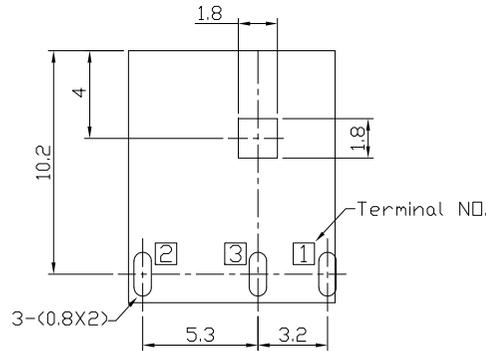
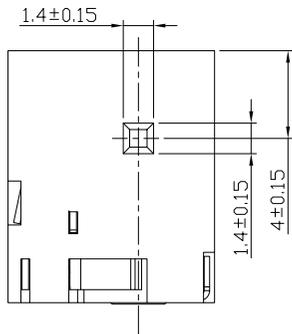
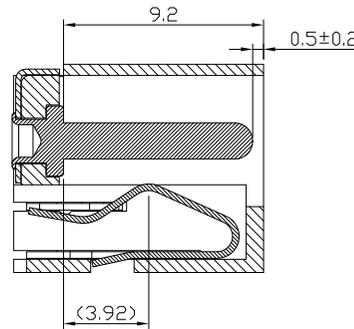


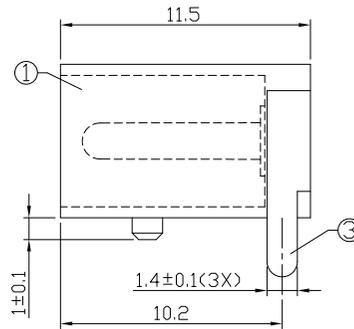

RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

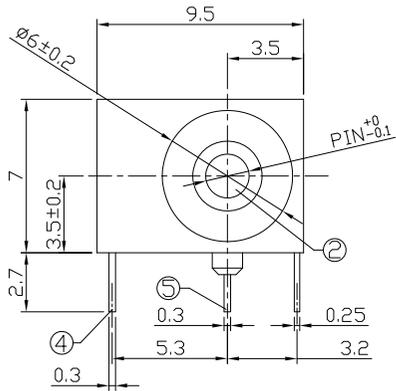

RECOMMENDED P.C.B. LAYOUT  
UNSPECIFIED TOLERANCE:±0.05  
(BOTTOM VIEW)

○: ITEM NO. □: TERMINAL NO.

MODEL CODE:

DCB0-00440- A □ PB BK S 0 4

(1) (2) (3)(4) (5) (6) (7)(8) (9)

(1):Series type:DIP DC POWER JACK.

(2):Series No.

(3):Schematic option: A

(4):Center pin diameter:

G=φ1.65, H=φ2.0, J=φ2.5

(5):Material of housing:

PB=PBT, 9T=PA9T

(6):Housing color:

BK=Black, 9A=White(0010=PBT)

(7):Terminal plating

S=Silver(Ag)

(8):Special option:

0=No special option

B=Stainless steel for 2#CONTACT

(9):Packing mode:

1=Reel packing

4=Bag packing

SPECIFICATION:

1.Rating : DC 25V 3A;

2.Contact resistance: ≤30mΩ;

After test:≤50mΩ

3.Insulation resistance: ≥100MΩ (DC500V);

After test:≥50MΩ




4.Withstand voltage: 500VAC ;

5.Insertion and extraction force: 3-30N;

6.life test: 5,000 cycles;

7.Operation temperature range:-20°C~70°C;

8.Preservative temperature range:-40°C~85°C;

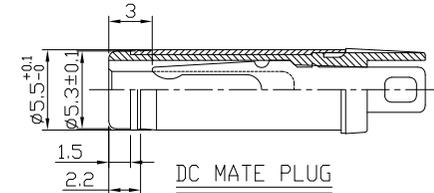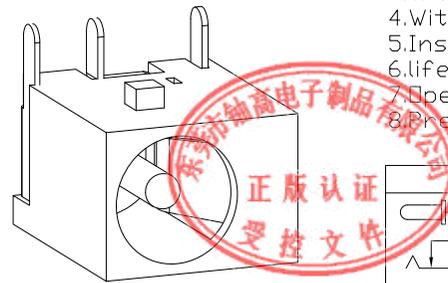

Model No.	G	H	J
CENTER PIN	φ1.65	φ2.0	φ2.5

NO.	PARTS	MATERIAL	Q'TY	FINISHING	TOLERANCE	ANGLES	UNITS	mm
⑤	Shunt terminal ③	Brass t=0.3	1	Silver plating	±0.3	±2'	MAT'L	
④	Tip spring ②	Phosphor bronze t=0.3	1	Silver plating			SEE NOTE	
③	Center pin contact ①	Brass t=0.25	1	Silver plating			FINISH	
②	Center pin	Brass	1	Ni plating			SEE NOTE	
①	Housing	PBT/PA9T	1				Q'TY	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

东莞市铀高电子制品有限公司

TITLE: DIP DC POWER JACK PART NO.: DCB0-00440  
DR: Ricky 2019/04/29 DWG NO.: AB0-00440  
CHKD: Ricky 2019/04/29

APPD:	SCALE	SHEET	REV.	CUSTOMER DRAWING
	1:1	1/1	A	