

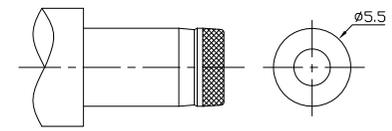



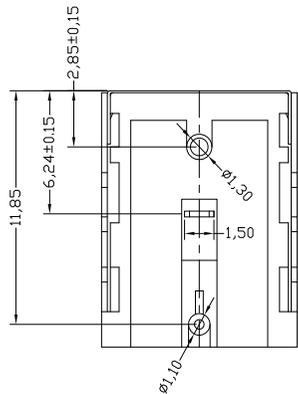


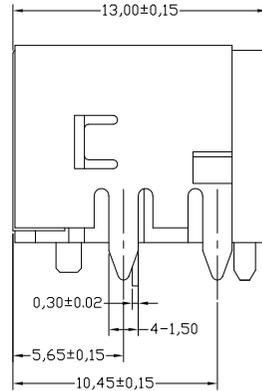

RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

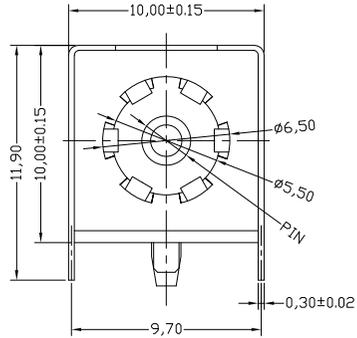

DC MATE PLUG

Model No.	H	J
CENTER PIN	ø2.0	ø2.5

P.C.B LAYOUT  
TOP VIEW

MODEL CODE:

DCS0-02000- D □ 9T BK S 0 3

(1) (2) (3)(4) (5) (6) (7)(8) (9)

(1):Series type:DIP DC POWER JACK.

(2):Series No.

(3):Schematic option: D

(4):Center pin diameter:

H=ø2.0 , J=ø2.5

(5):Material of housing:

9T=PA9T

(6):Housing color:

BK=Black

(7):Terminal plating

S=Silver(Ag)

(8):Special option:

0=No special option

(9):Packing mode:

3=Plastic box packing

Specification:

1.Rating :DC 50V 3A.

2.Contact resistance :≤100mΩ

3.Insulation resistance :≥100MΩ (DC250V).

4.Withstanding voltage :500VAC .

5.Insertion and extraction force :3~30N.

6.life test :5000cycles min.

7.Operation temperature range:-25°C~85°C

Bill of materials:

NO.	PARTS	MATERIAL	Q'TY	FINISHING	TOLERANCE	ANGLES	UNITS	东莞市铀高电子制品有限公司			
5	SPACER	9T NYLON (BLACK)	1		.X ± 0.35	X°.±5°	mm	东莞市铀高电子制品有限公司 正板认证 受控文件 TITLE: DIP DC POWER JACK PART NO.: DCS0-02000 DR: Ricky 2019/03/22 DWG NO.: ASS-02000 CHKD: Ricky 2019/03/22 APPD: SCALE 1:1 SHEET 1/1 REV. A CUSTOMER DRAWING			
4	BERRY PIN	COPPER ALLOY	1	Ag-Plating	.XX ± 0.25	.X°±3°	MAT'L				
3	CCAW	COPPER ALLOY	1	Ag-Plating	.XXX ± 0.15		SEE NOTE				
2	FOOT COVERLET	COPPER ALLOY	1	Ag-Plating			FINISH				
1	HOUSING	9T NYLON (BLACK)	1				SEE NOTE				
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			Q'TY			