

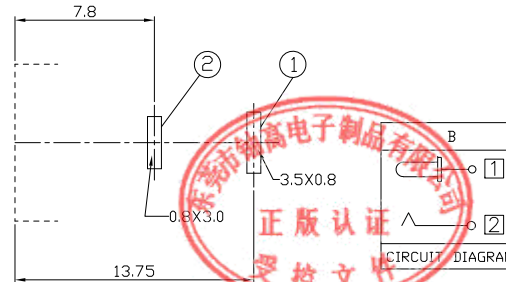
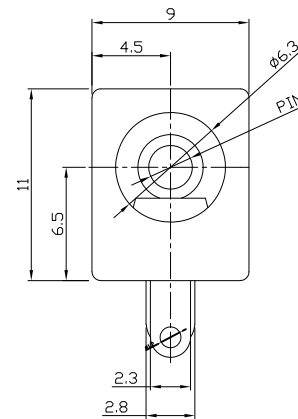


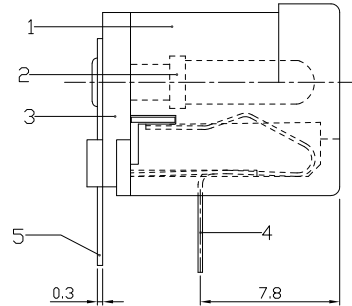

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

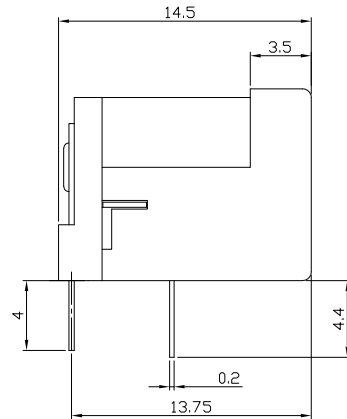

P.C.B LAYOUT

MODEL CODE:

DCE0-02110- B □ 66 BK S 0 4

(1) (2) (3)<(4) (5) (6) (7)<(8) (9)

(1):Series type:DIP DC POWER JACK.

(2):Series No.

(3):Schematic option: B

(4):Center pin diameter:

H=Ø2.0 , I=Ø2.35 , J=Ø2.5

(5):Material of housing:

66=PA66

(6):Housing color:

BK=Black

(7):Terminal plating

S=Silver(Ag)

(8):Special option:

0=No special option

(9):Packing mode:

4=Bag packing

Specification:

1.Rating :DC 30V 0.3A.

2.Contact resistance :≤100mΩ


3.Insulation resistance : ≥100MΩ (500VDC).

4.Withstanding voltage: 500VAC .

5.Insertion and extraction force: 0.3~3Kgs.

6.life test: 5000cycles min.

7.Operation temperature range:-25°C ~85°C



DC MATE PLUG

Bill of materials:

					GENERAL TOLERANCE		UNITS mm		东莞市铀高电子制品有限公司									
					WITHIN 1.5mm±0.1mm		MAT'L											
					OVER 1.5mm±0.2mm		SEE NOTE											
5	TERMINAL	BRASS STRIP	1	Ag PLATED			FINISH		TITLE: DIP DC POWER JACK		PART NO.: DCE0-02110							
4	SPRING TERMINAL	SUS	1	Ag PLATED			SEE NOTE		DR: Ricky 2019/03/19		DWG NO.: AZJ-02110							
3	COVER	NYLON	1	BLACK	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INDTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INDTECH INC.		Q'TY		CHKD: Ricky 2019/03/19		SCALE		SHEET		REV.		CUSTOMER DRAWING	
2	PLUG PIN	BRASS	1	Ni PLATED			APPD:		1:1		1/1		A					
1	CASE	NYLON	1	BLACK														
NO.	PARTS	MATERIAL	Q'TY	FINISHING														