




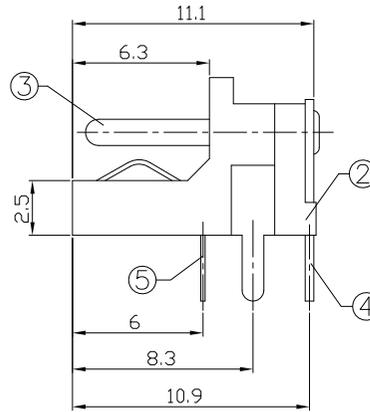

RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

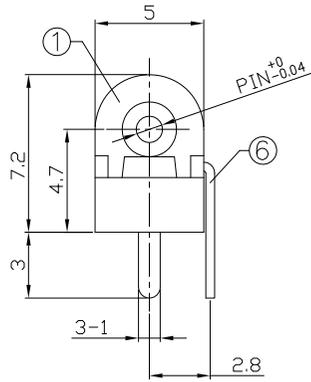

P.C.B Layout (Top view)


MODEL CODE:

DCB0-00010- A □ PB BK S 0 4


- (1) (2) (3)(4) (5) (6) (7)(8) (9)
 (1):Series type:DIP DC POWER JACK.
 (2):Series No.
 (3):Schematic option: A , B
 (4):Center pin diameter:
 A=∅0.65 , C=∅1.0 , E=∅1.3
 (5):Material of housing:
 PB=PBT (Standard)
 (6):Housing color:
 BK=Black
 (7):Terminal plating
 S=Silver(Ag)
 (8):Special option:
 0=No special option
 (9):Packing mode:
 4=Bag packing

SPECIFICATION

- Rating : DC 30V 1A;
- Contact resistance: ≤50mΩ;
After test:≤100mΩ
- Insulation resistance: ≥100MΩ (DC500V);
After test:≥50MΩ
- Withstand voltage: 500VAC ;
- Insertion and extraction force: 3-30N;
- life test: 5,000 cycles;
- Operation temperature range:-20°C~70°C;
- Preservative temperature range:-40°C~85°C;



Model No.	A	C	E
CENTER PIN	∅0.65	∅1.0	∅1.3
DC PLUG O.D.	∅2.35	∅3.5	∅3.5




DC MATE PLUG

○: ITEM NO. □: TERMINAL NO.

⑥	Shunt terminal ③	Brass t=0.4	1	Silver Plating	TOLERANCE	ANGLES	UNITS	东莞市铀高电子制品有限公司 TITLE: DIP DC POWER JACK PART NO.: DCB0-00010 DR: Ricky 2019/03/04 DWG NO.: AB0-00010 CHKD: Ricky 2019/03/04 APPD:
⑤	Tip spring ②	Stainless steel t=0.2	1	Silver Plating	±0.3	±2°	mm	
④	Center pin terminal ①	Brass t=0.4	1	Silver Plating			MAT'L	
③	Center pin ①	Brass	1	Nickel/CuSn Plating			SEE NOTE	
②	Cover	PBT	1				FINISH	
①	Housing	PBT	1				SEE NOTE	
NO.	PARTS	MATERIAL	Q'TY	FINISHING			Q'TY	SCALE SHEET REV. CUSTOMER DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.



1:1 1/1 A CUSTOMER DRAWING