



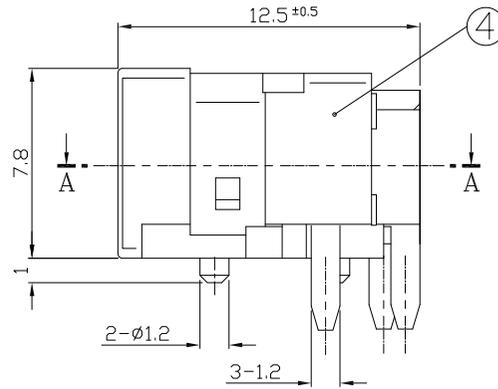

RoHS
Compliant
2002/95/EC


REV.	ECN. NO.	APPD.

DIMENSIONS


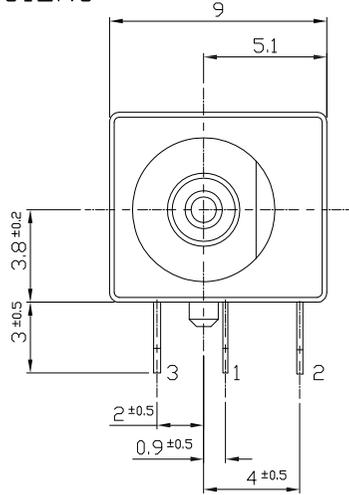


MODEL CODE:

- DCD0-39000- A C PB BK S 0 4
 (1) (2) (3)(4) (5) (6) (7)(8) (9)
 (1):Series type:DC POWER JACK.
 (2):Series No.
 (3):Schematic option: A
 (4):Center pin diameter:
 C=∅0.95mm
 (5):Material of housing:
 PB=PBT
 (6):Housing color:
 BK=Black
 (7):Terminal plating:
 S=Silver(Ag)
 (8):Special option:
 0=No special option
 (9):Packing mode:
 4=Bag packing

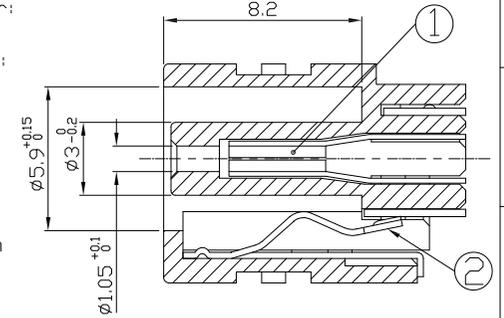


SECTION AA

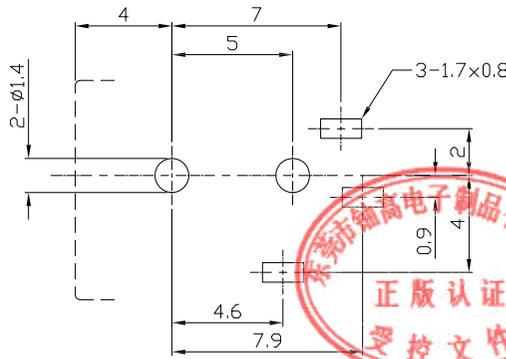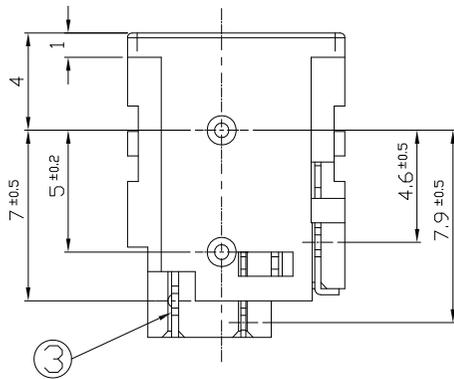


PC BOARD HOLE LAYOUT
(UPPER VIEW FROM DIRECTION OF INSERTION TO PCB)

Specification:

- 1.Rating : DC 13.5V 2A.
- 2.Contact resistance : ≤30mΩ
- 3.Insulation resistance : ≥100MΩ (500V DC).
- 4.Withstanding voltage : 500VAC.
- 5.Insertion and extraction force : 0.3~3Kgs.
- 6.Life test : 5,000 cycles min.
- 7.Operation temperature range:-25°C~70°C



Model No.	C
CENTER PIN	∅0.95mm

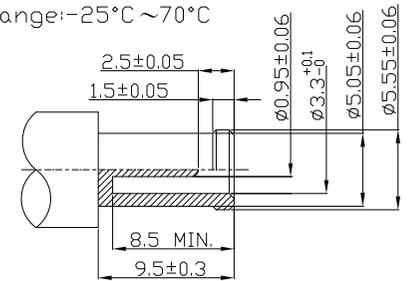

DC MATE PLUG

Bill of materials:

NO.	PARTS	MATERIAL	Q'TY	FINISHING	TOLERANCE	ANGLES	UNITS
④	CASING	PBT/GF RESIN	1	UL94V-0	X≤5=±0.10		mm
③	FIXED TERMINAL	BRASS	0.3t	1	Ag-PLATED	X> 5=±0.30	SEE NOTE
②	TIP SPRING	COPPER ALLOY	0.25t	1	Ag-PLATED		SEE NOTE
①	EARTH PIN	PBS	0.2t	1	Ag-PLATED		Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

东莞市铀高电子制品有限公司			
TITLE: DC POWER JACK		PART NO.: DCD0-39000	
DR: <i>Ricky</i> 2019/08/27		DWG NO.: AD0-39000	
CHKD: <i>Ricky</i> 2019/08/27		SCALE	SHEET
APPD:		1:1	1/1
		REV.	CUSTOMER DRAWING
		A	

