ROHS

版本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签名 SIGN	日期 DATE
V1.0		新版制定		June	20201214

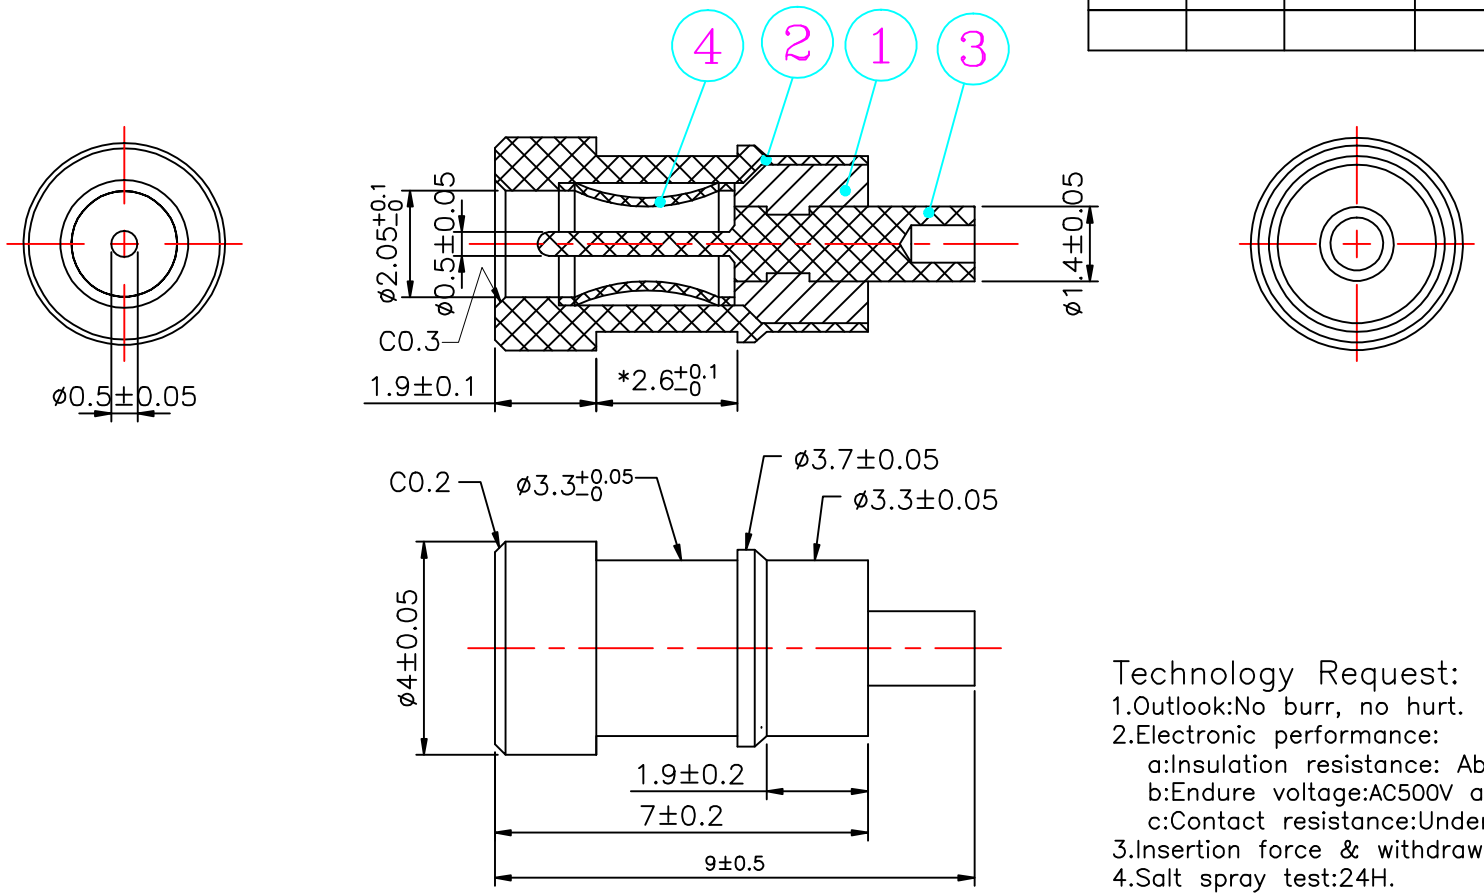

Technology Request:

1.Outlook:No burr, no hurt.
2.Electronic performance:
  a:Insulation resistance: Above DC500V/100MΩ;
  b:Endure voltage:AC500V at 1 minute;
  c:Contact resistance:Under 30mΩ;
3.Insertion force & withdrawal force:0.3–3kgf.
4.Salt spray test:24H.
5.Meet RoHS.
6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance
比例 Scale	5:1	xx.:±0.3
视图 Third angle projection		x.x:±0.1
		.xx:±0.05

NO.	PART	MATERIAL	PLATING
7			
6			
5			
4	弹圈	C5191	Ni 80u" Au0.8u"
3	中心针	C3604	Ni 80u" Au0.8u"
2	4X7.0X2.1X3.7	C3604	Ni 80u" Au0.8u"
1	PLASTIC	PA66	BLACK

核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY
June	杨义邦	苏伟伦

惠州市无双电子科技有限公司
HUIZHOU WS Electronic Technology Co.,Ltd
TEL: 86–752–6166601 FAX: 86–752–6166602

规格 DESCRIPTION:	DC JACK ø2.0*ø0.6*9.0
品名 P/N:	2006J40G卡盘3.7
图号 DRAWN NO:	CP–03–0179

E-mail: sales@chinaplug.cn www.chinaplug.cn www.dgchatou.com