
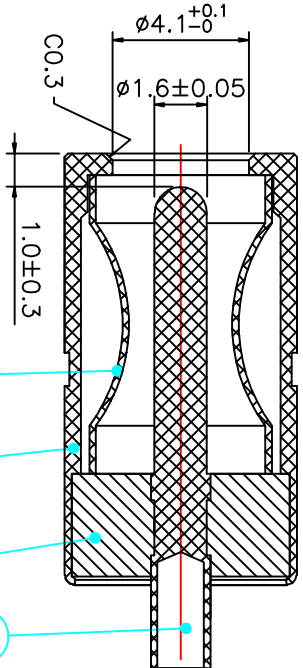

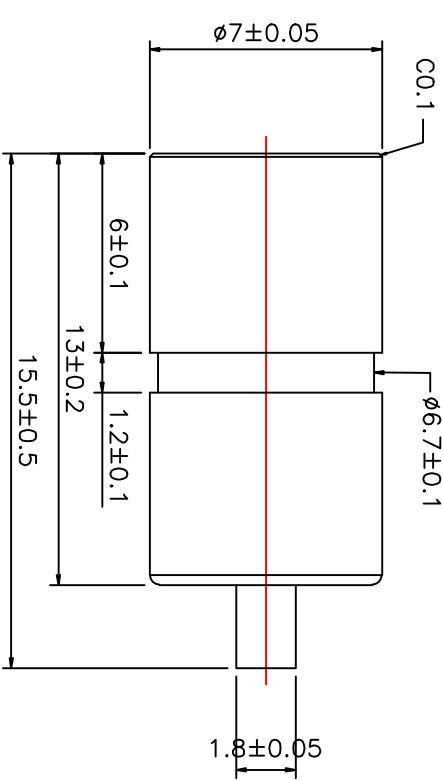


ROHS



Technology Request:
 1. Outlooking burr, no hurt.
 2. Electronic performance:
 a. Insulation resistance: Above DC500V/100MΩ;
 b. Endure voltage: AC500V at 1 minute;
 c. Contact resistance: Under 30mΩ;
 3. Insertion force & withdrawal force: 0.3-3kgf.
 4. Salt spray test: 24H.
 5. Meet RoHS.
 6. Remark * is important specification.

东莞市铀高电子有限公司

规格 DESCRIPTION: DC JACK $\phi 4.0 \times \phi 1.7 \times 15.5 \times \phi 7.0$

品名 P/N: 4017J70

图号 DRAWN NO: CP-03-0048

版本 REV	修正标记 REVLR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签名 SIGN	日期 DATE
V1.0		新板制定		June	20180901

单位 Unit	一般公差 The General Tolerance	7	8	9
mm	XX: ±0.3	4017 塑料	C5191	Ni 1um-3um
比例 Scale	XX: ±0.1	1.58*1.8*14.5 针	C3604	Ni 1um-3um
视图 Third angle projection	X: X: ±0.1	7*13*4.1 管	C3604	Ni 1um-3um
	.XX: ±0.05	1	PBT	BLACK
		NO.	MATERIAL	PLATING
		2	PART	
		3		
		4		
		5		
		6		
		7		

核准 APPROVED BY: June

校对 CHECKED BY: 杨义邦

制图 DRAWN BY: 李莹峰