



ROHS

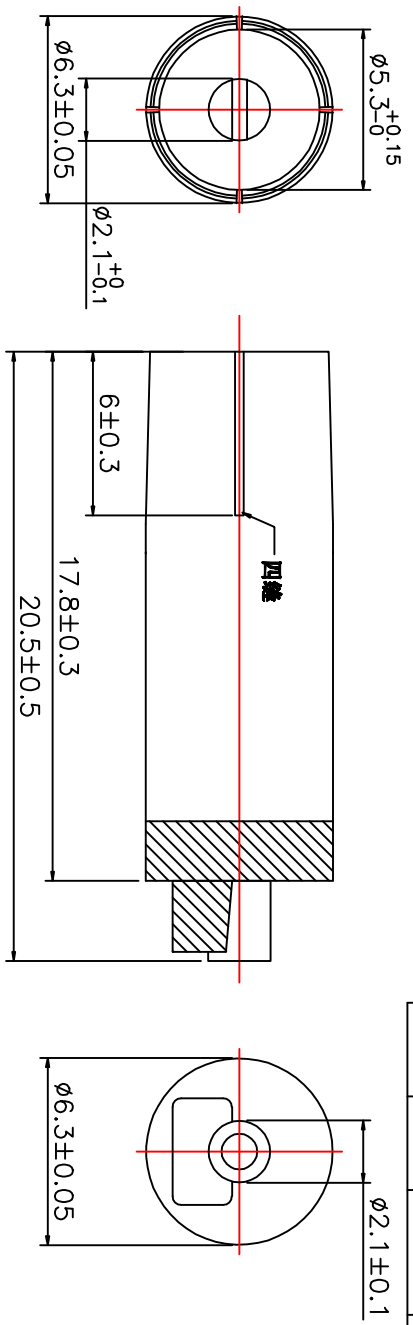

REV	REV.LTR	BEFORE REVISION	AFTER REVISION	DATE
V1.0		新版制定		June 20180917

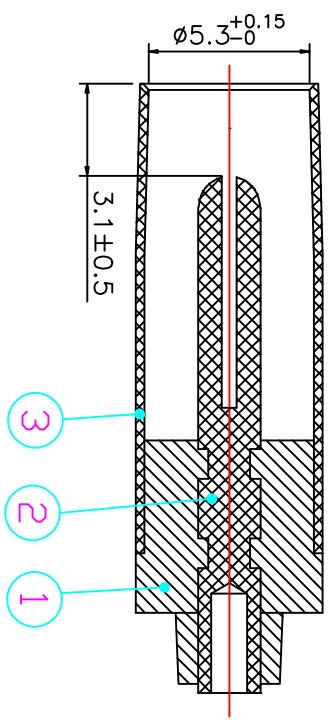

**Technology Request:**

- 1.Outlook: No burr, no hurt.
- 2.Electronic performance: a:Insulation resistance: Above DC500V/100MΩ; b:Endure voltage: AC500V for 1 minute; c>Contact resistance: Under 50mΩ; d:Insertion force & withdrawal force: 0.3-3kgf.
- 4.Salt spray test:24H.
- 5.Meet RoHS.
- 6.Remark \* is important specification.



东莞市铷高电子有限公司

单位	一般公差
mm	The general tolerance
比例	Scale
5:1	XX:±0.3
第三角投影	Third angle projection
	X:X:±0.1
	.XX:±0.05

NO.	MATERIAL	PLATING
1	PLASTIC	BLACK
2	2.1*17.4mm 铜管	NI 1~3um
3	6.3*16mm 铜管	H65
4		
5		
6		
7		

核准	校对	制图
APPROVED BY	CHECKED BY	DRAWN BY
June	杨义邦	李莹峰

规格	DESCRIPTION:
品名	P/N:
图号	DRAWN NO:

DC JACK 5.5\*2.1\*20.5  
5521U63开叉  
CP-03-0064

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---