

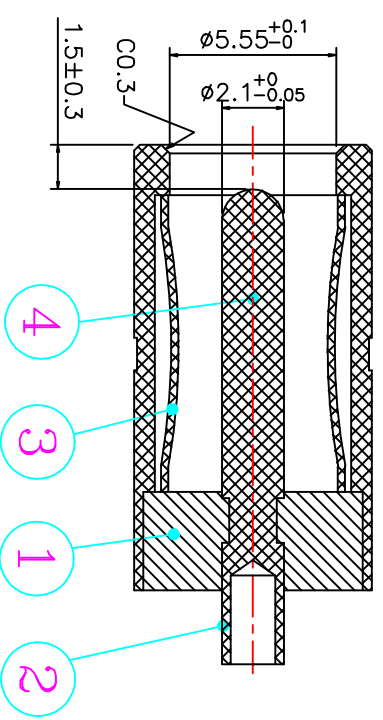


ROHS



Technology Request:  
 1.Outlook:No burr, no hurt.  
 2.Electronic performance:  
 a:Insulation resistance:  
 Above DC500V/100MΩ;  
 b:Endure-voltage:  
 AC500V dt 1 minute;  
 c:Contact resistance:  
 Under 30mΩ;  
 3.Insertion force & withdrawal force:  
 4.Soft spray test:24H.  
 5.Meet RoHS.  
 6.Remark \* is important specification.

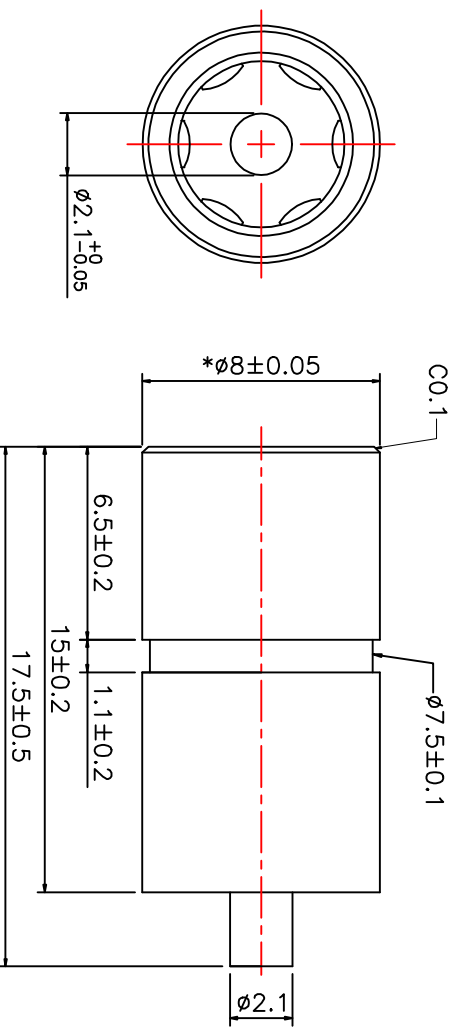

REV	REV LTR	BEFORE REVISION	AFTER REVISION	SIGN	DATE
V1.0		杨义邦		June	20180917

比例	公差
5:1	XX:±0.3
第三角投影	X.X:±0.1
	.XX:±0.05

NO.	PART	MATERIAL	PLATING
1			

NO.	PLATING
1	

批准	校对	制图
June	杨义邦	李莹峰

规格	DESCRIPTION:
DC JACK <math>\phi 5.5 \times 2.1 \times 17.5</math>	

图号	DRAWN NO:
CP-03-0070	

东莞市铷高电子有限公司