
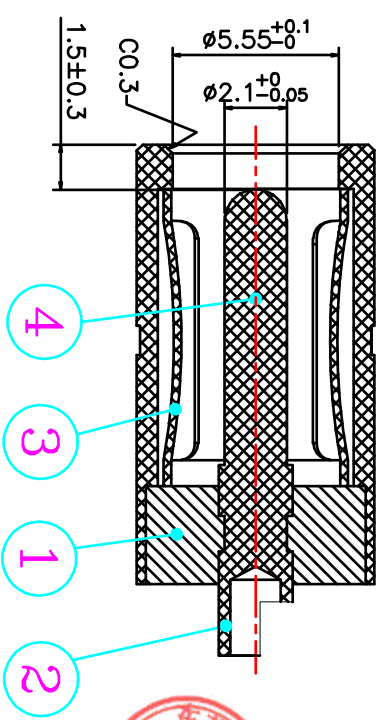


ROHS

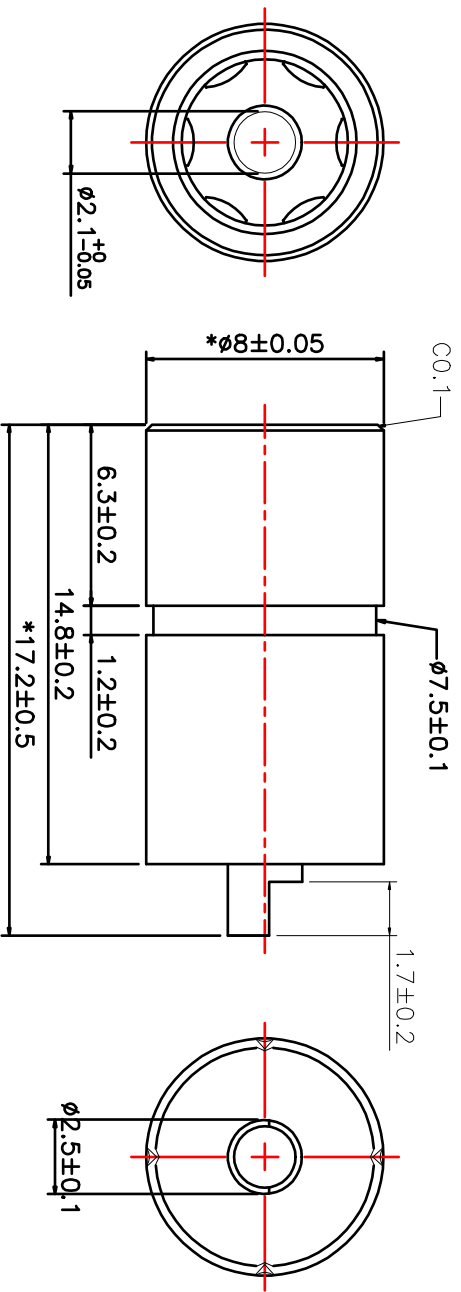

Technology Request:
 1.Outlook:No burr, no hurt.
 2.Electronic performance:
 a:Insulation resistance:
 Above DC500V/100MΩ;
 b:Endure voltage:
 AC500V at 1 minute;
 c:Contact resistance:
 Under 30mΩ;
 3.Insertion force & withdrawal force:
 0.3-3kgf.
 4.Salt spray test:24H.
 5.Meet RoHS.
 6.Remark * is important specification.

REV	REV LTR	BEFORE REVISION	AFTER REVISION	DATE
V1.0		核准制定		June 20180917

Unit	mm	The general tolerances
比例	5:1	XX:±0.3
第三角投影		X.X:±0.1
		.XX:±0.05

NO.	PART	MATERIAL
1	PLASTIC	PBT
2	PLASTIC	PLATING

NO.	PLATING
1	PLATING

批准	校对	制图
June	杨义邦	李莹峰

规格	DESCRIPTION:
DC JACK $\phi 5.5 \times 2.1 \times 17.2$	

图号	DRAWN NO:
CP-03-0074	

东莞市铷高电子制品有限公司