
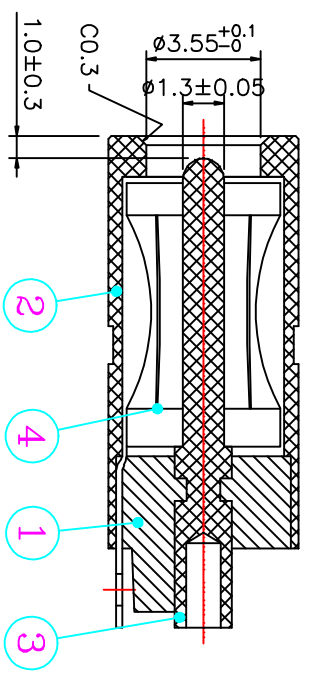

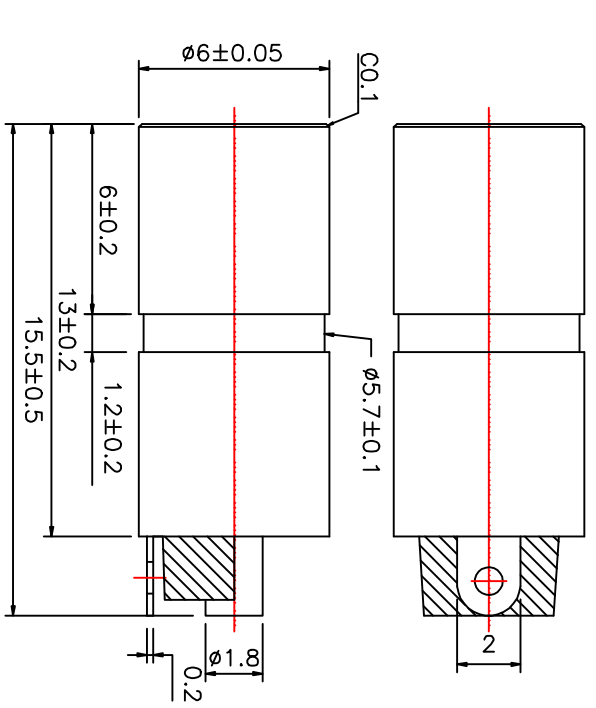


ROHS

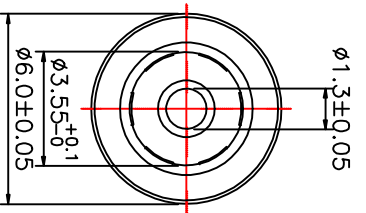

Request:
 1.Outlook:No burr, no hurt.
 2.Electronic performance:
 a:Insulation resistance: Above DC500V/100MQ;
 b:Endure voltage:AC500V at 1 minute;
 c:Contact resistance:Under 30mΩ;
 3.Insertion force & withdrawal force:0.3-3kgf.
 4.Salt spray test:48H.
 5.Meet RoHS.
 6.Remark * is important specification.

REV	修正描述 REV/LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	修正日期 SIGN	日期 DATE
V1.0		新版制定		June	20180901

公差 Unit	一般公差 The general tolerance
比例 Scale	XX:±0.3
视图 Third angle projection	X:X:±0.1
	.XX:±0.05

NO.	1	NO.	2
	PLASTIC		PART
	PLASTIC		MATERIAL
	BLACK		PLATING

核准 APPROVED BY	杨义邦	制图 DRAWN BY	李莹峰
校对 CHECKED BY	杨义邦		
日期	June		

规格 DESCRIPTION:		DC JACK Ø3.5*Ø1.35*15.5	
品名 P/N:		35135JL60	
图号 DRAWN NO:		CP-03-0034	

东莞市铷高电子有限公司

1

2

3

4

5

6

7

8

9