

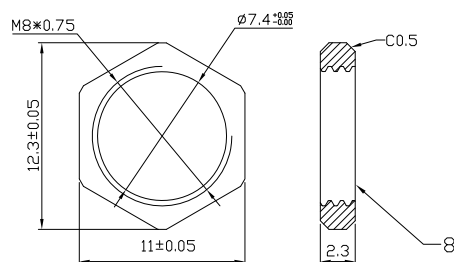
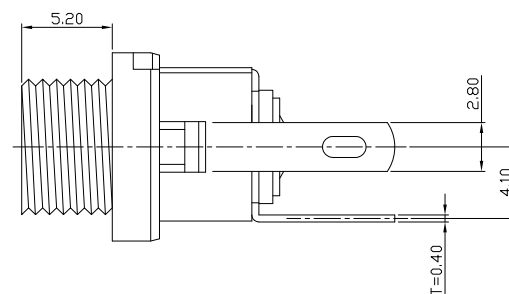


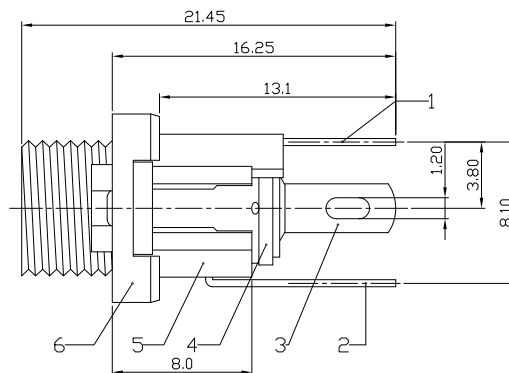


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

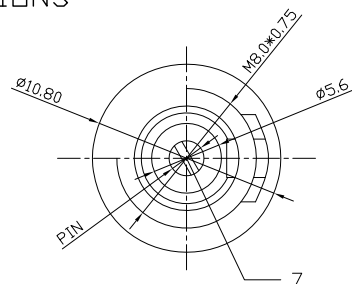

Nut

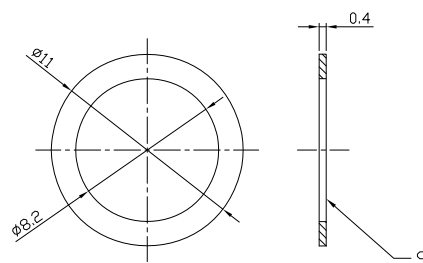

Washer

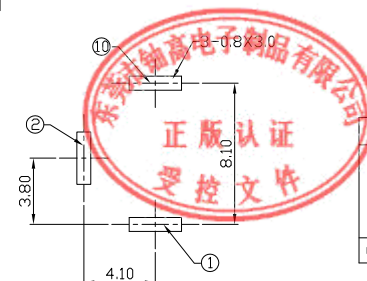

P.C.B LAYOUT

MODEL CODE:

DCE0-00260- A □ P□ BK S 0 4

(1) (2) (3)(4) (5) (6) (7)(8) (9)

(1):Series type:DIP DC POWER JACK.

(2):Series No.

(3):Schematic option: A

(4):Center pin diameter:

H=φ2.0 , I=φ2.35 , J=φ2.5

(5):Material of housing:

P□=POM

(6):Housing color:

BK=Black

(7):Terminal plating

S=Silver(Ag)

(8):Special option:

0=No special option

(9):Packing mode:

4=Bag packing

Specification:

1.Rating :DC 30V 0.3A.

2.Contact resistance :≤100mΩ


3.Insulation resistance : ≥100MΩ (500VDC).

4.Withstanding voltage: 500VAC .


5.Insertion and extraction force: 0.3~3Kgs.

6.life test: 5000cycles min.

7.Operation temperature range:-25°C~85°C



Model No.	H	I	J
CENTER PIN	φ2.0	φ2.35	φ2.5

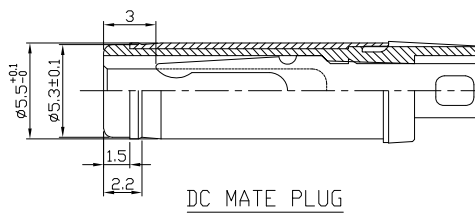

Bill of materials:

9	WASHER-2	SPCC	1	Ni PLATED
8	NUT	BRASS	1	Ni PLATED
7	PLUG PIN	BRASS	1	Ni PLATED
6	SOCKET	BRASS	1	Ni PLATED
5	CASE	POM	1	BLACK
4	WASHER-1	PAPER TAPE	2	RED
3	SPRING TERMINAL	PBS STRIP	1	Ag PLATED
2	CONTACT	BRASS STRIP	1	Ag PLATED
1	TERMINAL	BRASS STRIP	1	Ag PLATED
NO.	PARTS	MATERIAL	Q'TY	FINISHING

GENERAL TOLERANCE

WITHIN 1.5mm±0.1mm

OVER 1.5mm±0.2mm

SEE NOTE

SEE NOTE

SEE NOTE

SEE NOTE

SEE NOTE

SEE NOTE

SEE NOTE

SEE NOTE

UNITS

mm

MAT'L

SEE NOTE

FINISH

SEE NOTE

Q'TY

SEE NOTE

SEE NOTE

SEE NOTE

SEE NOTE

东莞市铀高电子制品有限公司

TITLE: DIP DC POWER JACK

DR: Ricky 2019/03/18

CHKD: Ricky 2019/03/18

APPD:

PART NO.: DCE0-00260

DWG NO.: AZJ-00260

SCALE: 1:1

SHEET: 1/1

REV: A

CUSTOMER DRAWING

SEE NOTE

SEE NOTE