




RoHS  
Compliant  
2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

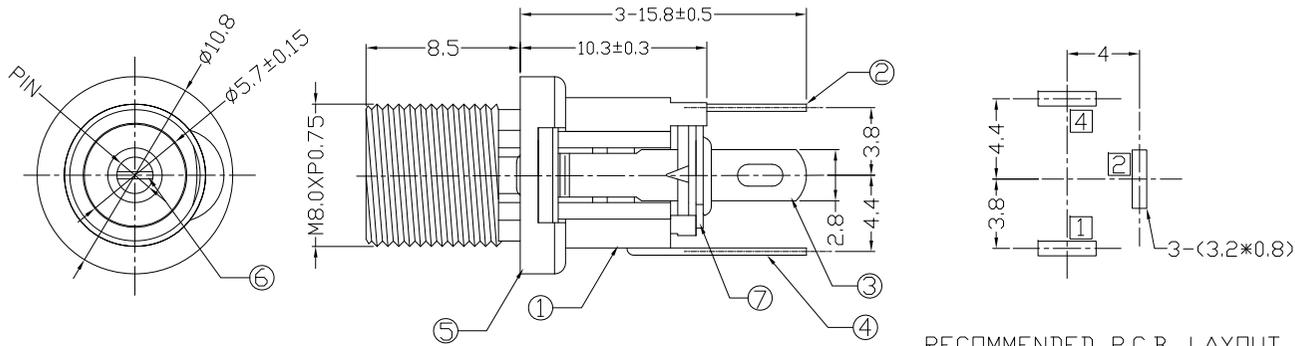

RECOMMENDED P.C.B. LAYOUT  
UNSPECIFIED TOLERANCE:±0.05  
(TOP VIEW)

MODEL CODE:

DCB0-025BM- A □ PB BK C 0 4

(1) (2) (3)(4) (5) (6) (7)(8) (9)

(1):Series type:DIP DC POWER JACK.

(2):Series No.

(3):Schematic option: A , B

(4):Center pin diameter:

H=∅2.0 , I=∅2.35 , J=∅2.5

(5):Material of housing:

PB=PBT (Only)

(6):Housing color:

BK=Black (Only)

(7):Terminal plating

S=Silver(Ag)

T=Tin(Sn)

C=copper&tin alloy plating (Standard)

(8):Special option:

0=No special option

(9):Packing mode:

4=Bag packing

SPECIFICATION:

1.Rating : DC 30V 3A;

2.Contact resistance: ≤30mΩ;

After test:≤50mΩ

3.Insulation resistance: ≥100MΩ (DC500V);

After test:≥50MΩ



4.Withstand voltage: 500VAC ;

5.Insertion and extraction force: 3-30N;

6.life test: 5,000 cycles;

7.Operation temperature range:-20°C~70°C;

8.Preservative temperature range:-40°C~85°C;

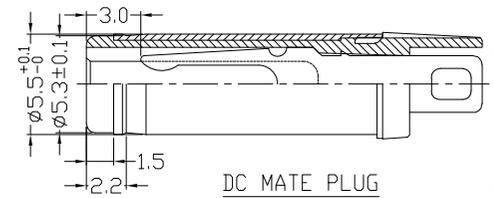

Model No.	H	I	J
CENTER PIN	∅2.0	∅2.35	∅2.5

○: ITEM NO. □: TERMINAL NO.

NO.	PARTS	MATERIAL	Q'TY	FINISHING
⑨	Washer	Stel	1	Ni-plating
⑧	Nut	Brass	1	Ni-plating
⑦	Washer	Bakelite	2	
⑥	Pin	Bronze	1	Ni-plating
⑤	Bushing	Brass	1	Ni-plating
④	Shunt Terminal ④	Brass	1	Cu-Sn-Plating
③	Tip Spring ②	Phosphor bronze	1	Cu-Sn-Plating
②	Center pin terminal ①	Brass	1	Cu-Sn-Plating
①	Housing	PBT	1	Black

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

TOLERANCE	ANGLES	UNITS
±0.3	±2°	mm
		MAT'L
		SEE NOTE
		FINISH
		SEE NOTE
		Q'TY

东莞市铀高电子制品有限公司

TITLE: DIP DC POWER JACK


PART NO.: DCB0-025BM

DR: Ricky 2019/04/10


DWG NO.: AB0-025BM

CHKD: Ricky 2019/04/10

SCALE: 1:1 SHEET: 1/1 REV: A CUSTOMER DRAWING



Nut



washer