


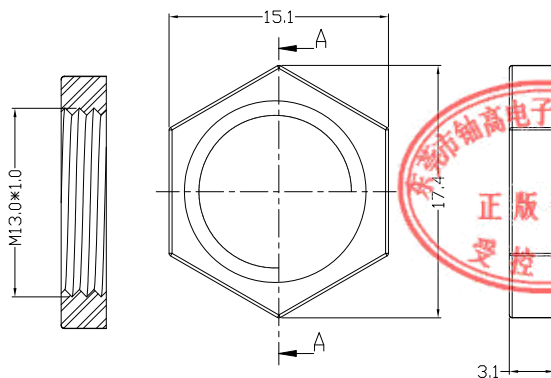


RECOMMENDED P.C.B. LAYOUT
UNSPECIFIED TOLERANCE:±0.05
(TOP VIEW)

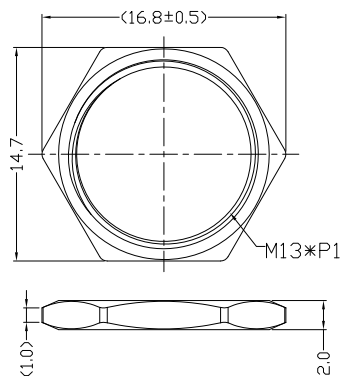

1. Rating : DC 30V 1A;
2. Contact resistance: $\leq 50\text{m}\Omega$;
3. Insulation resistance: $\geq 100\text{M}\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-30N;
6. life test: 5,000 cycles;
7. Operation temperature range:-20°C~70°C;
8. Preservative temperature range:-25°C~85°C;

○: ITEM NO. □: TERMINAL NO.

⑥	Shunt terminal ③	Copper Alloy	1	Sn Plating	TOLERANCE	ANGLES	UNITS mm
⑤	Tip spring ②	Stainless steel	1	Sn Plating	.X ±0.50	X ±5°	MAT'L
④	Center pin terminal ①	Copper Alloy	1	Sn Plating	.XX ±0.30	.X ±3°	SEE NOTE
③	Center pin ①	Copper Alloy	1	Ni Plating	.XXX ±0.15	.XX ±2°	FINISH
②	Cover	PF	1		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		SEE NOTE
①	Housing	Thermoplastic	1	Black			Q'TY
NO.	PARTS	MATERIAL	Q'TY	FINISHING			

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVTECH INC.

SCALE	SHEET	REV.	CUSTOMER DRAWING
1:1	1/1	A	