

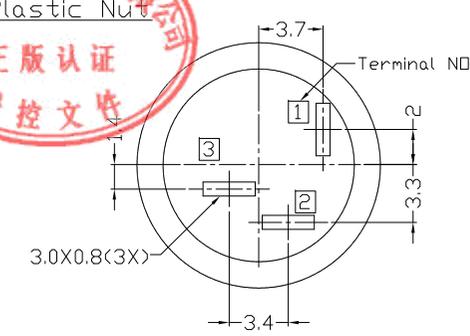

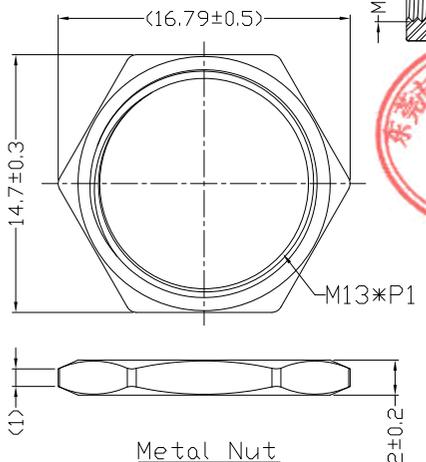
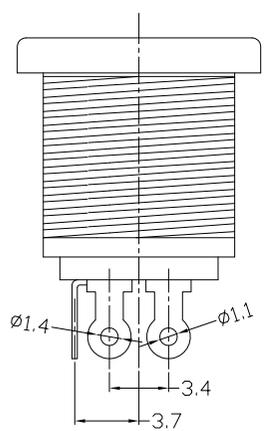
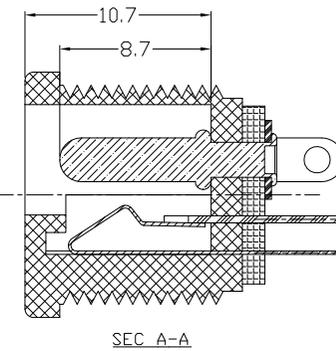


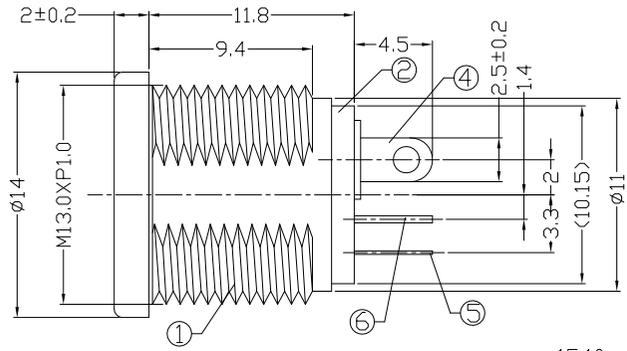

RoHS  
Compliant  
2002/95/EC

DIMENSIONS

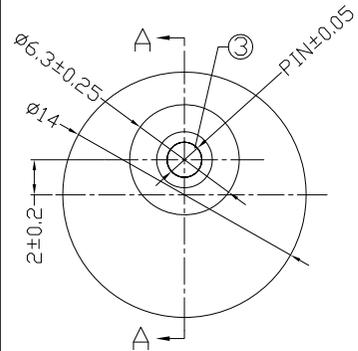



MODEL CODE:

DCB0-00220- A □ PB BK T 0 4

- (1):Series type:DIP DC POWER JACK.
- (2):Series No.
- (3):Schematic option: A , B
- (4):Center pin diameter:  
H=∅2.0 , I=∅2.35 , J=∅2.5
- (5):Material of housing:  
PB=PBT (Standard)
- (6):Housing color:  
BK=Black
- (7):Terminal plating  
T=Tin(Sn)
- (8):Special option:  
0=Mate metal nut  
1=Mate plastic nut  
B=Metal nut(nut need been assembled onto DC jack)
- (9):Packing mode:  
4=Bag packing

SPECIFICATION:

- 1.Rating : DC 20V 2.5A;
- 2.Contact resistance: ≤50mΩ;  
After test:≤100mΩ
- 3.Insulation resistance: ≥100MΩ (DC500V);  
After test:≥50MΩ
- 4.Withstand voltage: 500VAC ;
- 5.Insertion and extraction force: 3-30N;
- 6.life test: 5,000 cycles;
- 7.Operation temperature range:-20°C~70°C;
- 8.Preservative temperature range:-40°C~85°C;

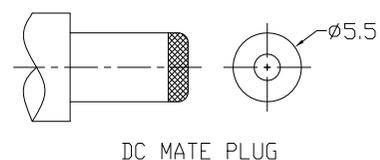

Model No.	H	I	J
CENTER PIN	∅2.0	∅2.35	∅2.5

RECOMMENDED P.C.B. LAYOUT  
UNSPECIFIED TOLERANCE:±0.05  
(BOTTOM VIEW)

○: ITEM NO. □: TERMINAL NO.

NO.	PARTS	MATERIAL	Q'TY	FINISHING	TOLERANCE	ANGLES	UNITS
⑥	Shunt terminal ③	Brass t=0.3	1	Tin Plating			mm
⑤	Tip spring ②	Stainless steel t0.25	1	Tin Plating	±0.3	±2'	MAT'L
④	Center pin terminal ①	Brass t=0.3	1	Tin Plating			SEE NOTE
③	Center pin ①	Copper alloy	1	CuSn Plating			FINISH
②	Cover	PF	1				SEE NOTE
①	Housing	PBT	1	Black			Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

**东莞市铀高电子制品有限公司**

TITLE:	DIP DC POWER JACK	PART NO.:	DCB0-00220
DR:	Ricky 2019/04/10	DWG NO.:	AB0-00220
CHKD:	Ricky 2019/04/10	SCALE	SHEET
APPD:		1:1	1/1
		REV.	A
		CUSTOMER	DRAWING