

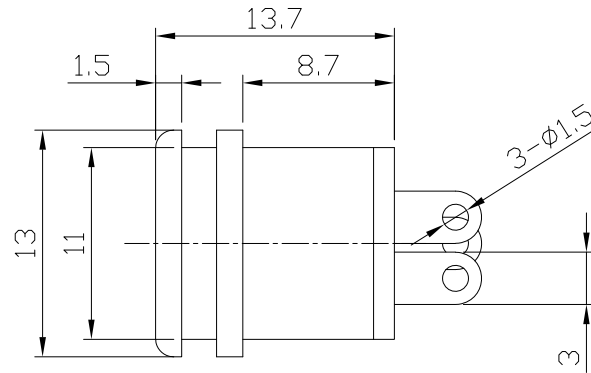
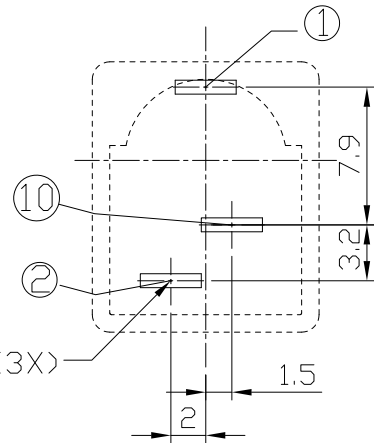


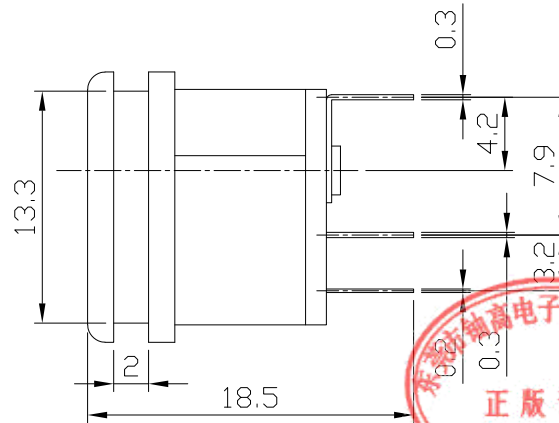

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

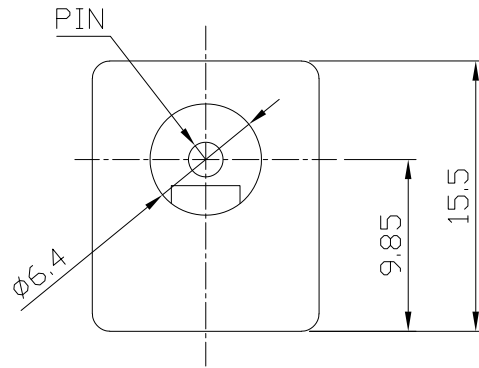

MODEL CODE:

DCE0-02290- A □ PC BK S 0 4

(1) (2) (3)(4) (5) (6) (7)(8) (9)

(1):Series type:DIP DC POWER JACK.

(2):Series No.

(3):Schematic option: A

(4):Center pin diameter:

H=Ø2.0 , I=Ø2.35 , J=Ø2.5, X=Ø2.7

(5):Material of housing:

PC=PC

(6):Housing color:

BK=Black

(7):Terminal plating

S=Silver(Ag)

(8):Special option:

0=No special option

(9):Packing mode:

4=Bag packing

Specification:

1.Rating :DC 30V 0.3A.

2.Contact resistance :≤100mΩ.



3.Insulation resistance : ≥100MΩ (500VDC).

4.Withstanding voltage: 500VAC .

5.Insertion and extraction force: 0.3~3Kgs.

6.life test: 5000cycles min.

7.Operation temperature range:-25°C ~85°C



DC MATE PLUG

Model No.	H	I	J	X
CENTER PIN	Ø2.0	Ø2.35	Ø2.5	Ø2.7

Bill of materials:

					GENERAL TOLERANCE	UNITS	东莞市铀高电子制品有限公司			
					WITHIN 1.5mm±0.1mm	mm				
					OVER 1.5mm±0.2mm		TITLE: DIP DC POWER JACK			
							PART NO.: DCE0-02290			
							DR: Ricky 2019/03/19			
							DWG NO.: AZJ-02290			
							CHKD: Ricky 2019/03/19			
							SCALE: 1:1			
							SHEET: 1/1			
							REV: A			
							CUSTOMER DRAWING			