








RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

### DIMENSIONS


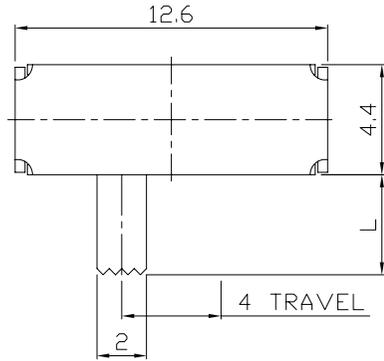


### MODEL CODE

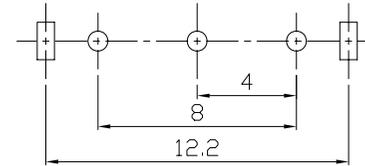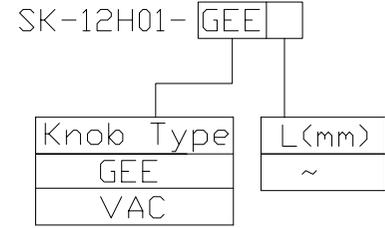

P.C.B LAYOUT  
BOTTOM VIEW

CIRCUIT DIAGRAM

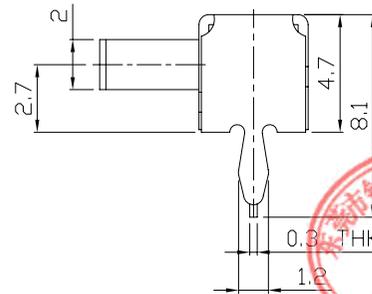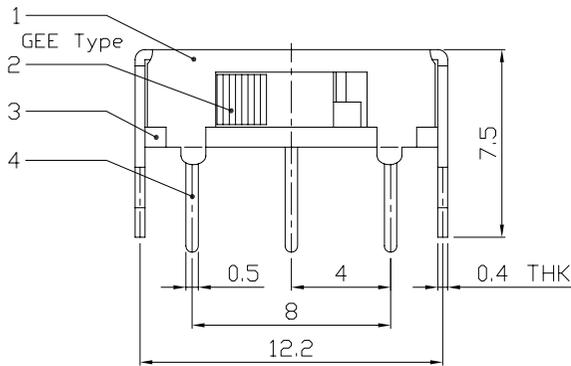

### ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	NOT SPECIFIED
TRAVEL	4mm
OPERATING FORCE	200±100gf
OPERATING LIFE(cycles)	10,000



8						
7						
6	SPRING PLATE	SUS	1	NATURAL		
5	CONTACT CLIP	PBS C5210R-EH	1	Ag CLAD		
4	TERMINAL	BRASS STRIP	5	Ag PLATED OVER Ni PLATED		
3	BASE	PHENOLIC RESIN	1	NATURAL		
2	KNOB	PPOM	1	BLACK		
1	FRAME	STEEL STRIP	1	Ni PLATED		
NO.	PARTS	MATERIAL	Q'TY	FINISHING		

WITHIN 1.5mm: ±0.1mm  
OVER 1.5mm: ±0.2mm

UNITS mm

MAT'L SEE NOTE

FINISH SEE NOTE

Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

**东莞市铀高电子制品有限公司**

TITLE:	SLIDE SWITCH / HORIZONTAL	PART NO.:	SK-12H01
DR:	Ricky 2015/12/08	DWG NO.:	ADJ-12H01
CHKD:	Ricky 2015/12/08	SCALE	4:1
APPD:		SHEET	1/1
		REV.	A
		CUSTOMER DRAWING	