

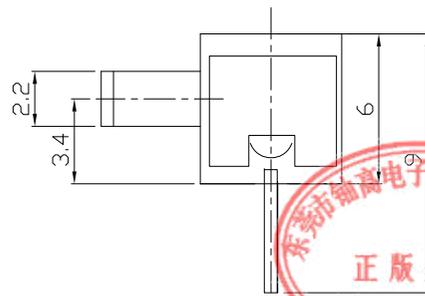


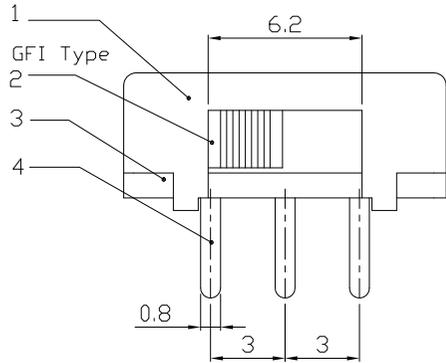



RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.


### DIMENSIONS

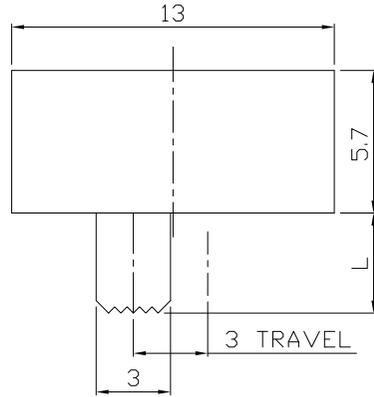

### MODEL CODE

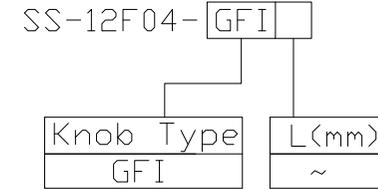

P.C.B LAYOUT  
BOTTOM VIEW



CIRCUIT DIAGRAM

### ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3mm
OPERATING FORCE	200±100gf
OPERATING LIFE(cycles)	10,000



8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	<b>东莞市铀高电子制品有限公司</b>						
7					OVER 1.5mm: ±0.2mm	MAT'L								
6	SPRING	SUS WIRE	1	NATURAL		SEE NOTE		TITLE:	SLIDE SWITCH / HORIZONTAL			PART NO.:	SS-12F04	
5	CONTACT	BRASS STRIP	1	Ag PLATED				DR:	Ricky 2016/08/10			DWG NO.:	AZJ-12F04	
4	TERMINAL	BRASS STRIP	1	Ag PLATED				CHKD:	Ricky 2016/08/10					
3	TERMINAL BASE	PHENOLIC RESIN	1	NATURAL				APPD:			SCALE	SHEET	REV.	CUSTOMER
2	KNOB	POM	1	BLACK							3:1	1/1	A	DRAWING
1	COVER	MILD STEEL	1	Ni PLATED										
NO.	PARTS	MATERIAL	Q'TY	FINISHING										

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

