






RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

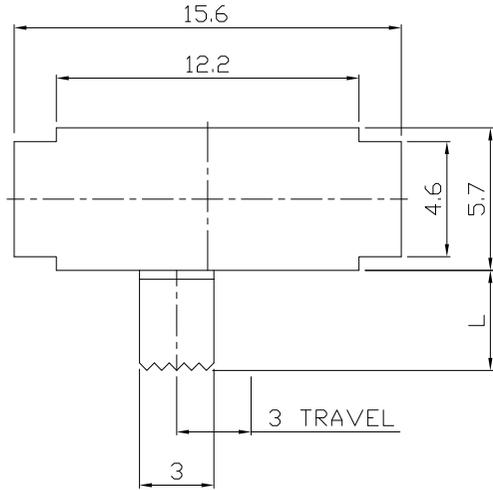

MODEL CODE

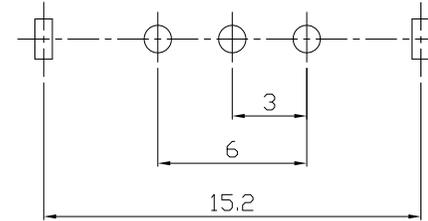
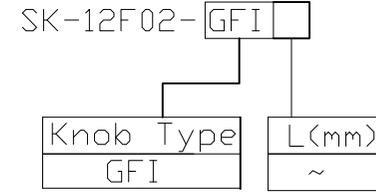


P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

GFI Type

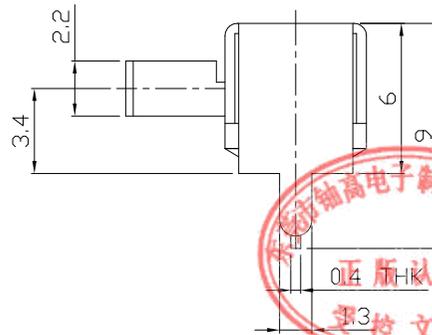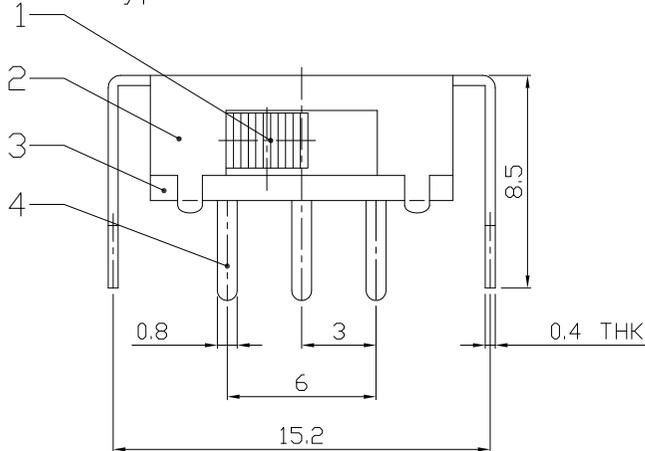

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000



8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	东莞市铀高电子制品有限公司					
7					OVER 1.5mm: ±0.2mm	MAT'L							
6	SPRING	BRASS STRIP	1	Ag PLATED		SEE NOTE	TITLE:	SLIDE SWITCH / HORIZONTAL					
5	CONTACT	STEEL STRIP	1	NATURAL			DR:	Ricky 2016/06/22					
4	TERMINAL	BRASS STRIP	3	Ag PLATED			CHKD:	Ricky 2016/06/22					
3	BASE	PHENOLIC RESIN	1	NATURAL			APPD:						
2	FRAME	STEEL STRIP	1	Ni PLATED			SCALE	3:1	SHEET	1/1	REV.	A	CUSTOMER
1	KNOB	POM	1	BLACK									DRAWING
NO.	PARTS	MATERIAL	Q'TY	FINISHING									

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.