

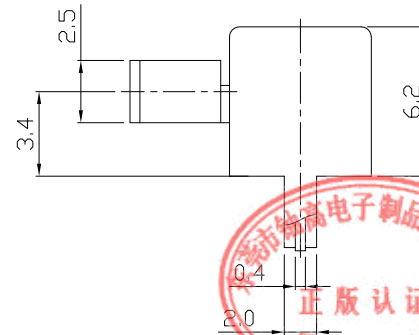


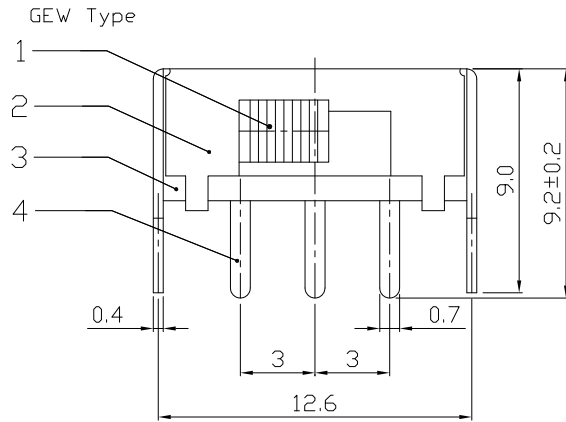

RoHS
Compliant
2002/95/EC


REV.	ECN.	NO.	APPD.

DIMENSIONS

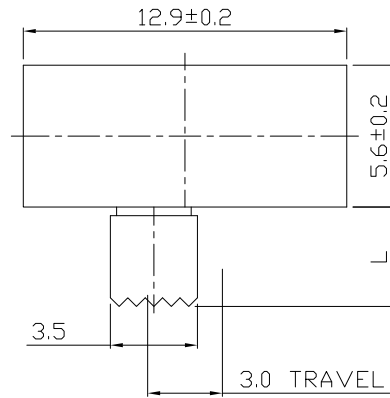


MODEL CODE

SK-12E14-	GEW
Knob Type	L(mm)
GEW	~

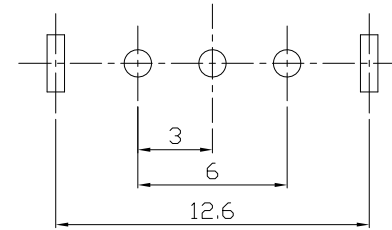

P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3mm
OPERATING FORCE	250±80gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	东莞市铀高电子制品有限公司				
7					OVER 1.5mm: ±0.2mm	MAT'L					
6	CONTACT (CLIP)	BRASS STRIP	1	SILVER PLATED		SEE NOTE	TITLE:	PART NO.:			
5	SPRING	STEEL WIRE	1				SLIDE SWITCH / HORIZONTAL	SK-12E14			
4	TERMINAL	BRASS STRIP	3	SILVER PLATED			DR:	Ricky 2016/06/22	DWG NO.:		
3	TERMINAL BASE	PHENOL IC RESIN	1	NATURAL			CHKD:	Ricky 2016/06/22	ADL-12E14		
2	FRAME	IRON STRIP	1	NI PLATED			APPD:		SCALE	SHEET	REV.
1	KNOB	POM	1	BLACK					3:1	1/1	A
NO.	PARTS	MATERIAL	Q'TY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.				CUSTOMER DRAWING		