

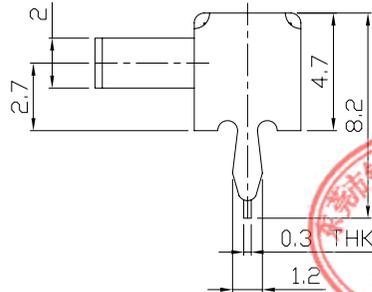
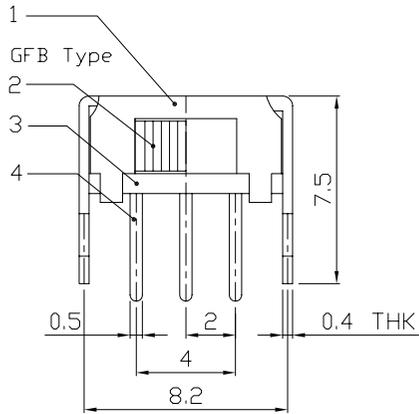




RoHS
Compliant
2002/95/EC

| REV. | ECN. | NO. | APPD. |
|------|------|-----|-------|
| | | | |
| | | | |
| | | | |

DIMENSIONS

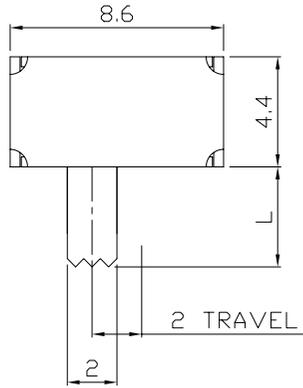


MODEL CODE


SK-12D20-GFB

| Knob Type |
|-----------|
| GFB |
| VAC |

| L(mm) |
|-------|
| ~ |



P.C.B LAYOUT
BOTTOM VIEW




CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

| | |
|------------------------|--------------|
| RATING | 0.3A 50V DC |
| CIRCUIT | 1P2T |
| CONTACT RESISTANCE | 30mΩ MAX. |
| TIMING | NON-SHORTING |
| TRAVEL | 2mm |
| OPERATING FORCE | 250±100gf |
| OPERATING LIFE(cycles) | 10,000 |



| | | | | | |
|-----|--------------|-----------------|------|--------------------------|--|
| 8 | | | | | |
| 7 | | | | | |
| 6 | SPRING PLATE | STAINLESS STEEL | 1 | NATURAL | |
| 5 | CONTACT CLIP | PBS C5210R-EH | 1 | Ag CLAD | |
| 4 | TERMINAL | BRASS STRIP | 3 | Ag PLATED OVER Ni PLATED | |
| 3 | BASE | PHENOLIC RESIN | 1 | NATURAL | |
| 2 | KNOB | POM | 1 | BLACK | |
| 1 | FRAME | STEEL STRIP | 1 | Ni PLATED | |
| NO. | PARTS | MATERIAL | Q'TY | FINISHING | |

WITHIN 1.5mm: ±0.1mm
OVER 1.5mm: ±0.2mm

UNITS mm

MAT'L

SEE NOTE

FINISH

SEE NOTE

Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

| | | | |
|----------------------|---------------------------|------------------|-----------|
| 东莞市铀高电子制品有限公司 | | | |
| TITLE: | SLIDE SWITCH / HORIZONTAL | PART NO.: | SK-12D20 |
| DR: | Ricky 2015/12/03 | DWG NO.: | ADJ-12D20 |
| CHKD: | Ricky 2015/12/03 | SCALE | 4:1 |
| APPD: | | SHEET | 1/1 |
| | | REV. | A |
| | | CUSTOMER DRAWING | |