

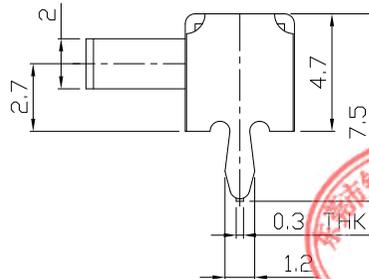
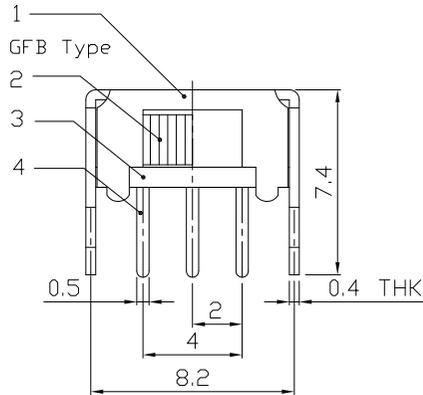






RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.


### DIMENSIONS

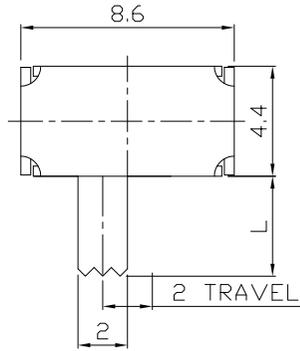

### MODEL CODE

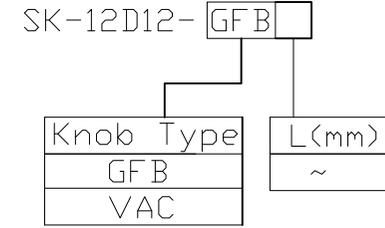

P.C.B LAYOUT  
BOTTOM VIEW



CIRCUIT DIAGRAM

### ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000



8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	<b>东莞市铀高电子制品有限公司</b>							
7					OVER 1.5mm: ±0.2mm	MAT'L									
6	SPRING PLATE	SUS	1	Ag PLATED		SEE NOTE		TITLE:	SLIDE SWITCH / HORIZONTAL			PART NO.:	SK-12D12		
5	CONTACT CLIP	PBS STRIP	1	Ag PLATED				DR:	Ricky 2016/06/21			DWG NO.:	ADL-12D12		
4	TERMINAL	BRASS STRIP	3	Ag PLATED				CHKD:	Ricky 2016/06/21			SCALE	SHEET	REV.	CUSTOMER
3	BASE	PHENOLIC RESIN	1	NATURAL				APPD:				4:1	1/1	A	DRAWING
2	KNOB	POM	1	BLACK											
1	FRAME	STEEL STRIP	1	Ni PLATED											
NO.	PARTS	MATERIAL	Q'TY	FINISHING											

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.