




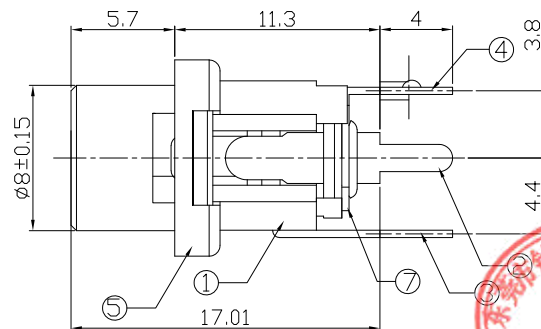



Technical drawing of a shaft cross-section showing dimensions: $PIN+0 -0.05$, $\varnothing 10.8$, $\varnothing 5.6+0.15 -0.05$, and a circled 6.

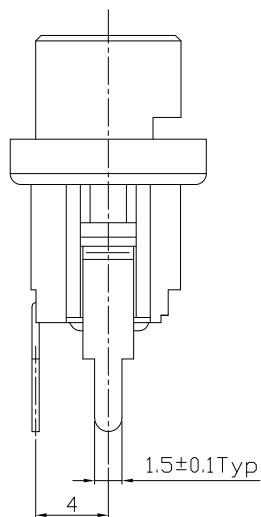

RECOMMENDED P.C.B. LAYOUT
UNSPECIFIED TOLERANCE:±0.05
(BOTTOM VIEW)

4=Bag packing

8. Preservative temperature range: $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$;

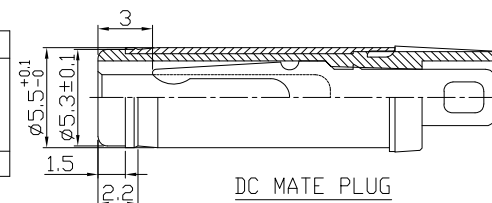

Model No.	H	I	J
CENTER PIN	ø2.0	ø2.35	ø2.5

○: ITEM NO. □: TERMINAL NO.

					TOLERANCE	ANGLES	UNITS mm	东莞市铀高电子制品有限公司						
					±0.3	±2°	MAT'L							
							SEE NOTE	TITLE: DIP DC POWER JACK		PART NO.: DCB0-00260				
							FINISH	DR: Ricky 2019/04/10		DWG NO.: AB0-00260				
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INDTCH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INDTCH INC.		SEE NOTE	CHKD: Ricky 2019/04/10						
							Q'TY	APPD:		SCALE		SHEET	REV.	CUSTOMER DRAWING
										1:1		1/1	A	
NO.	PARTS	MATERIAL	Q'TY	FINISHING										
⑦	Washer	Bakelite	2	Nickel plating										
⑥	Pin	Copper alloy	1	Nickel plating										
⑤	Bushing	Copper alloy	1	Nickel plating										
④	Shunt Terminal ③	Brass	1	Copper&tin plating										
③	Tip Spring ②	Phosphor bronze	1	Copper&tin plating										
②	Center pin terminal ①	Brass	1	Copper&tin plating										
①	Housing	PA66/PBT	1	Black										