






RoHS Compliant
2002/95/EC




Halogen Free

REV.	ECN.	NO.	APPD.

DIMENSIONS

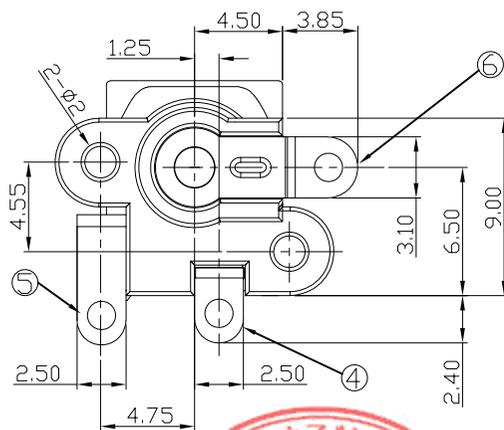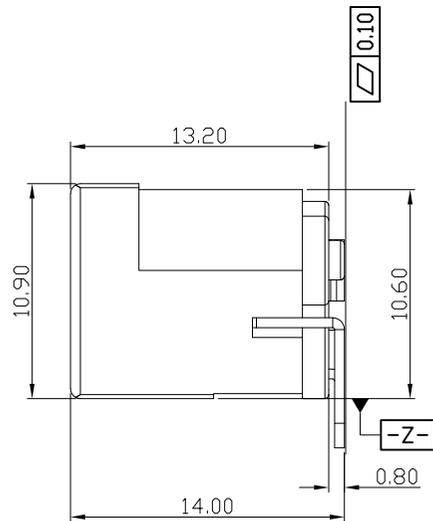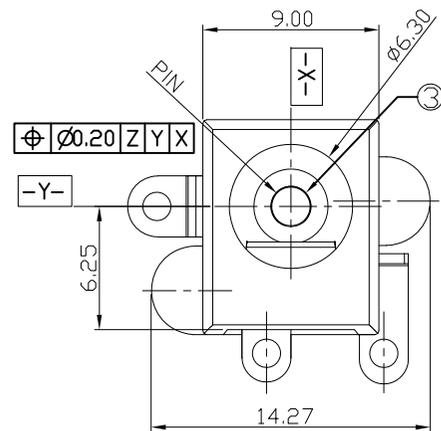

WITH POLYIMIDE TAPE

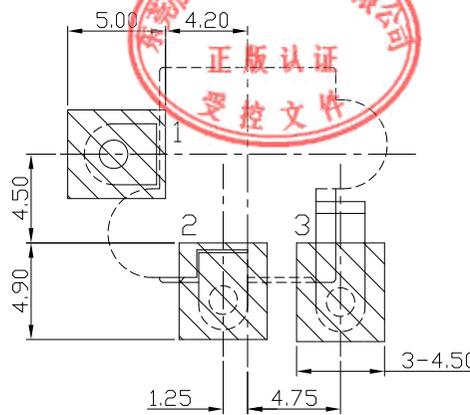
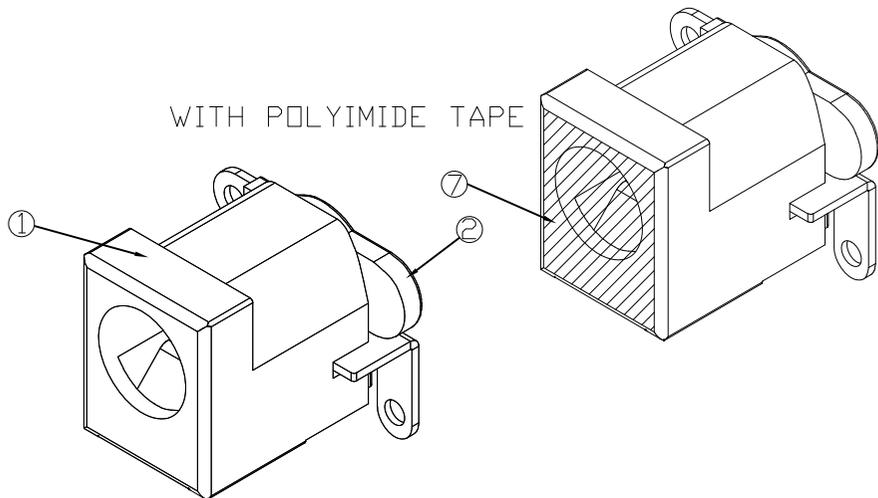


MODEL CODE:

- DCS0-0240E- A □ LC BK S 0 1
 (1) (2) (3)(4)(5) (6) (7)(8) (9)
 (1):Series type:SMD DC POWER JACK.
 (2):Series No.
 (3):Schematic option: A
 (4):Center pin diameter:
 E=φ1.3 , H=φ2.0 , J=φ2.5
 (5):Material of housing:
 LC=LCP
 (6):Housing color:
 BK=Black
 (7):Terminal plating
 S=Silver(Ag)
 (8):Special option:
 0=No special option
 (9):Packing mode:
 1=Reel packing

Specification:

- Rating :DC 20V 3A.
- Contact resistance :≤30mΩ
- Insulation resistance :≥100MΩ (DC500V).
- Withstanding voltage: 500VAC .
- Insertion and extraction force: 3~30N.
- Life test: 5000cycles min.
- Operation temperature range:-25°C~85°C



DC MATE PLUG

Model No.	E	H	J
CENTER PIN	φ1.3	φ2.0	φ2.5

RECOMMENDED PCB LAYOUT <TOP VIEW>
 NOTE : TOLERANCE FOR PCB LAYOUT IS ± 0.05

Bill of materials:

NO.	PARTS	MATERIAL	Q'TY	FINISHING	TOLERANCE	ANGLES	UNITS
⑦	POLYIMIDE TAPE		1		.X ± 0.3	X°.±5°	mm
⑥	PIN TERMINIAL	BRASS	1	Ag	.XX ± 0.2	.X°±3°	MAT'L
⑤	SHUNT TERMINAL	BRASS	1	Ag			SEE NOTE
④	SPRING TERMINAL	PBS	1	Ag			SEE NOTE
③	CENTER PIN	COPPER	1	NI			FINISH
②	BOTTOM COVER	PA10T	1	BLACK			SEE NOTE
①	P1 HOUSING	LCP	1	UL94V-0 BLACK			Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

东莞市铀高电子制品有限公司			
TITLE: SMD DC POWER JACK		PART NO.: DCS0-0240E	
DR: Ricky 2019/03/22		DWG NO.: ASS-0240E	
CHKD: Ricky 2019/03/22		SCALE: 1:1	SHEET: 1/1
APPD:		REV: A	CUSTOMER DRAWING