


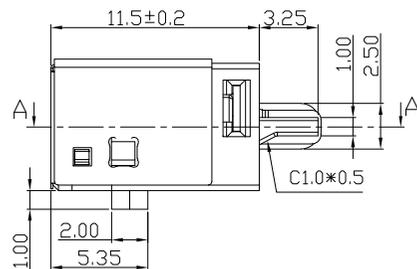
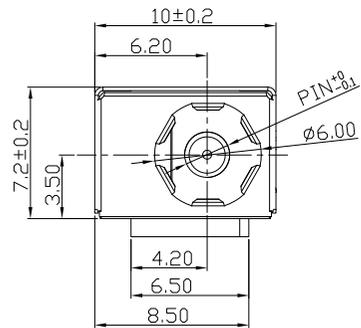





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS


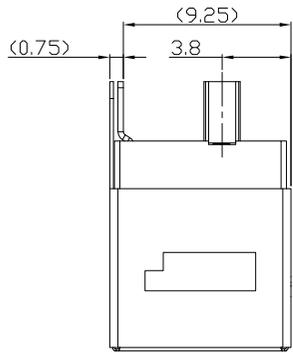


SECTION:A-A

MODEL CODE:
DCB0-0167B- B □ PB BK S 0 4
 (1) (2) (3)(4) (5) (6) (7)(8) (9)
 (1):Series type:DC POWER JACK.
 (2):Series No.
 (3):Schematic option: B
 (4):Center pin diameter:
 G=Ø1.65 , H=Ø2.0 , J=Ø2.5
 (5):Material of housing:
 10=PA10T , PB=PBT
 (6):Housing color:
 BK=Black
 (7):Terminal plating
 S=Silver(Ag)
 (8):Special option:
 0= Ni Plating for Center Pin(RoHS)
 1= CuSn Plating for Center Pin(RoHS)
 (9):Packing mode:
 4=Bag packing

SPECIFICATION:

- Rating : DC 20V 5A;
- Contact resistance: ≤30mΩ;
After test:≤50mΩ
- Insulation resistance: ≥100MΩ (DC500V);
After test:≥50MΩ
- Withstand voltage: 500VAC;
- Insertion and extraction force: 3-30N;
- Life test: 5,000 cycles;
- Operation temperature range:-20°C~70°C;
- Preservative temperature range:-40°C~85°C;

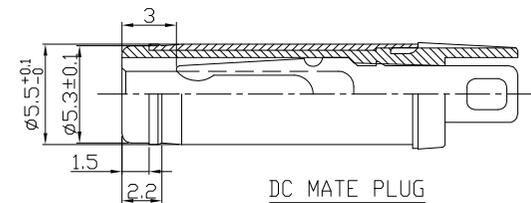

Model No.	G	H	J
CENTER PIN	Ø1.65	Ø2.0	Ø2.5

○: ITEM NO. □: TERMINAL NO.

NO.	PARTS	MATERIAL	Q'TY	FINISHING	TOLERANCE	ANGLES	UNITS
⑥	Ground Terminal	Stainless steel	1	Nickel plating			mm
⑤	Shield plate	Stainless steel	1		.X ±0.50	X ±5'	MAT'L
④	Peg	Copper Alloy	1	Tin plating	.XX ±0.30	.X ±3'	SEE NOTE
③	Tip spring ②	Copper Alloy	1	Silver plating	.XXX ±0.15	.XX ±2'	FINISH
②	Center pin ①	Zinc Alloy	1	Ni/CuSn Plating			SEE NOTE
①	Housing	Thermoplastic	1	Black			Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

东莞市铀高电子制品有限公司			
TITLE: DC POWER JACK		PART NO.: DCB0-0167B	
DR: <i>Ricky</i> 2019/05/06		DWG NO.: AB0-0167B	
CHKD: <i>Ricky</i> 2019/05/06		SCALE	SHEET
APPD:	1:1	1/1	REV. A
			CUSTOMER DRAWING