

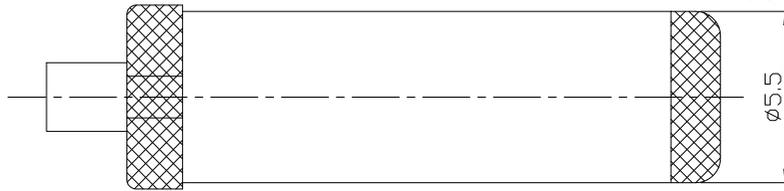
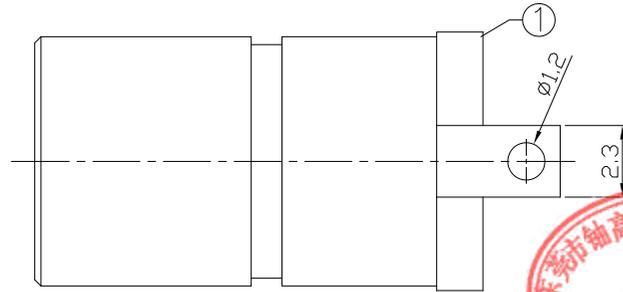


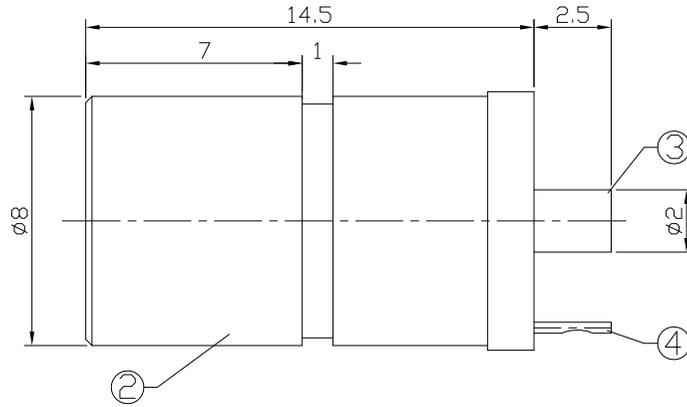

RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

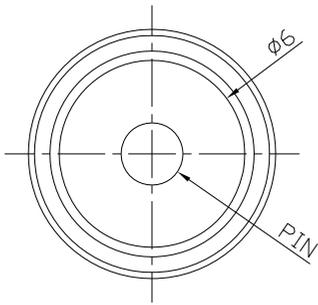


MODEL CODE:

DCB0-00840- B □ 66 BK I 0 4

- (1) (2) (3)(4) (5) (6)(7)(8) (9)
 (1):Series type: DC POWER JACK.
 (2):Series No.
 (3):Schematic option: B
 (4):Center pin diameter:
 H=2.0 , I=2.35 , J=2.5
 (5):Material of housing:
 66=PA66 (Only)
 (6):Housing color:
 BK=Black (Only)
 (7):Terminal plating
 T=Tin(Sn) (Standard)
 S=Silver(Ag)
 G=Gold(Au)
 (8):Special option:
 0=No special option
 (9):Packing mode:
 4=Bag packing

SPECIFICATION:

- 1.Rating : DC 20V 3A;
 2.Contact resistance: $\leq 50m\Omega$;
 3.Insulation resistance: $\geq 100M\Omega$ (DC250V);
 4.Withstand voltage: 500VAC ;
 5.Insertion and extraction force: 3-30N;
 6.Life test: 5,000 cycles;
 7.Operation temperature range:-20°C~70°C;
 8.Preservative temperature range:-40°C~85°C;



Model No.	H	I	J
CENTER PIN	$\phi 2.0$	$\phi 2.35$	$\phi 2.5$

○: ITEM NO. □: TERMINAL NO.

NO.	PARTS	MATERIAL	Q'TY	FINISHING	TOLERANCE	ANGLES	UNITS	东莞市铀高电子制品有限公司			
④	spring	Stainless steel	1	Sn-Plating	± 0.3	$\pm 2'$	mm	TITLE: DC POWER JACK PART NO.: DCB0-00840			
③	Center pin	Brass	1	Sn-Plating							
②	Bushing	Brass	1	Ni-Plating				DR: Ricky 2019/05/02 DWG NO.: AB0-00840			
①	Housing	PA66	1								
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			SCALE	SHEET	REV.	CUSTOMER DRAWING
								1:1	1/1	A	