

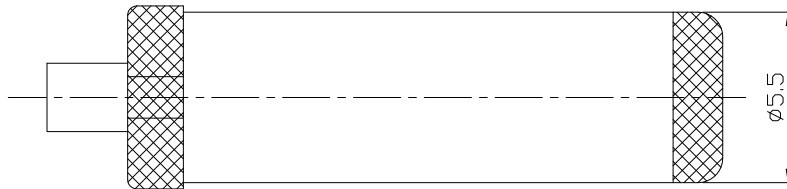
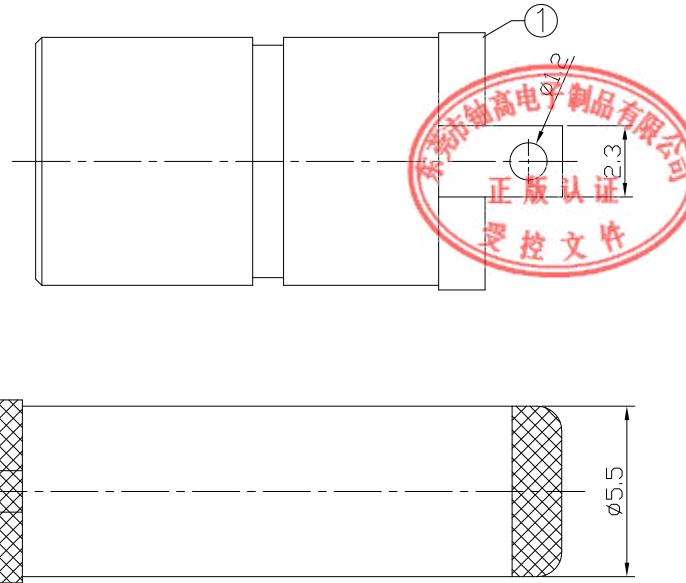


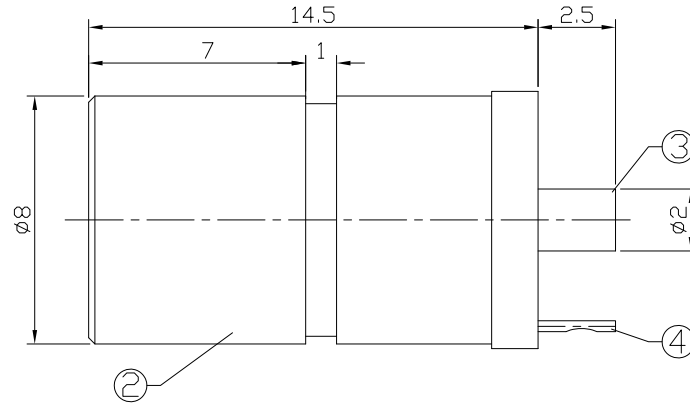

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS




MODEL CODE:

DCB0-00840- B □ 66 BK I 0 4

- (1) (2) (3)(4) (5) (6)(7)(8) (9)
- (1):Series type: DC POWER JACK.
- (2):Series No.
- (3):Schematic option: B
- (4):Center pin diameter:
H=2.0 , I=2.35 , J=2.5
- (5):Material of housing:
66=PA66 (Only)
- (6):Housing color:
BK=Black (Only)
- (7):Terminal plating
T=Tin(Sn) (Standard)
S=Silver(Ag)
G=Gold(Au)
- (8):Special option:
0=No special option
- (9):Packing mode:
4=Bag packing

SPECIFICATION:

- 1.Rating : DC 20V 3A;
- 2.Contact resistance: $\leq 50m\Omega$;
- 3.Insulation resistance: $\geq 100M\Omega$ (DC250V);
- 4.Withstand voltage: 500VAC ;
- 5.Insertion and extraction force: 3-30N;
- 6.life test: 5,000 cycles;
- 7.Operation temperature range:-20°C~70°C;
- 8.Preservative temperature range:-40°C~85°C;



Model No.	H	I	J
CENTER PIN	ø2.0	ø2.35	ø2.5

○: ITEM NO. □: TERMINAL NO.

					TOLERANCE	ANGLES	UNITS mm	东莞市铀高电子制品有限公司			
					±0.3	±2°	MAT'L	DC POWER JACK			
							SEE NOTE	PART NO.: DCB0-00840			
							FINISH	DR: Ricky 2019/05/02			
							SEE NOTE	DWG NO.: AB0-00840			
							Q'TY	CHKD: Ricky 2019/05/02			
								APPD:			
								SCALE	SHEET	REV.	CUSTOMER
								1:1	1/1	A	DRAWING