

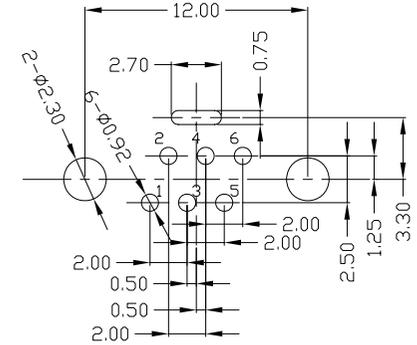



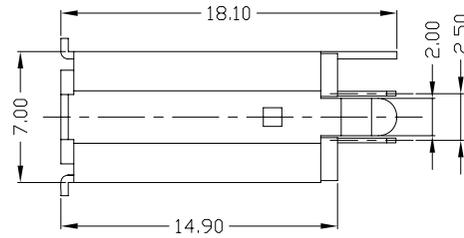


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.




RECOMMENDED PCB LAYOUT

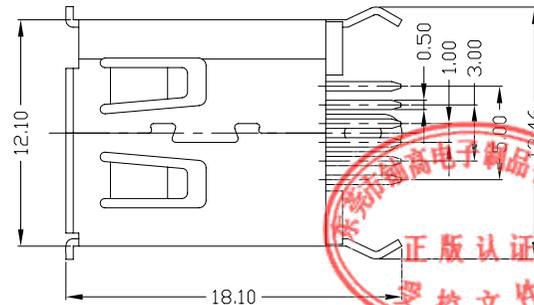

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1AMP, 30V AC;
 - INSULATION RESISTANCE: 1000M Ω MIN;
 - CONTACT RESISTANCE: 30m Ω MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ± 0.35	X.' $\pm 2^*$	UNITS	东莞市铀高电子制品有限公司					
					.X ± 0.3	.X' $\pm 1^*$	mm						
3	HOUSING	PBT+30%GF	1	UL94V-0	.XX ± 0.25	.XX'	MAT'L	TITLE:	PART NO.:				
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XXX ± 0.15	.XXX'	SEE NOTE	1394 6F 180度插板式	IENF-06*N-1BP30				
1	TERMINAL	COPPER ALLOY	6	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			FINISH	DR: gan 2014/09/20	DWG NO.: AII-P30			
							SEE NOTE	CHKD: gan 2014/09/20	SCALE	SHEET	REV.	CUSTOMER	
							Q'TY	APPD:	1:1	1/1	B	DRAWING	