
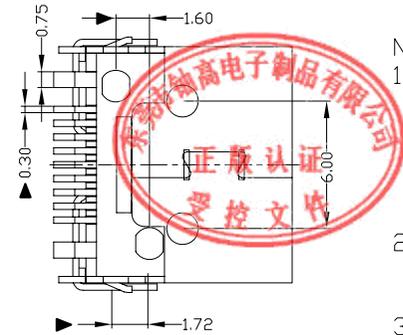


REV.	ECN.	NO.	APPD.

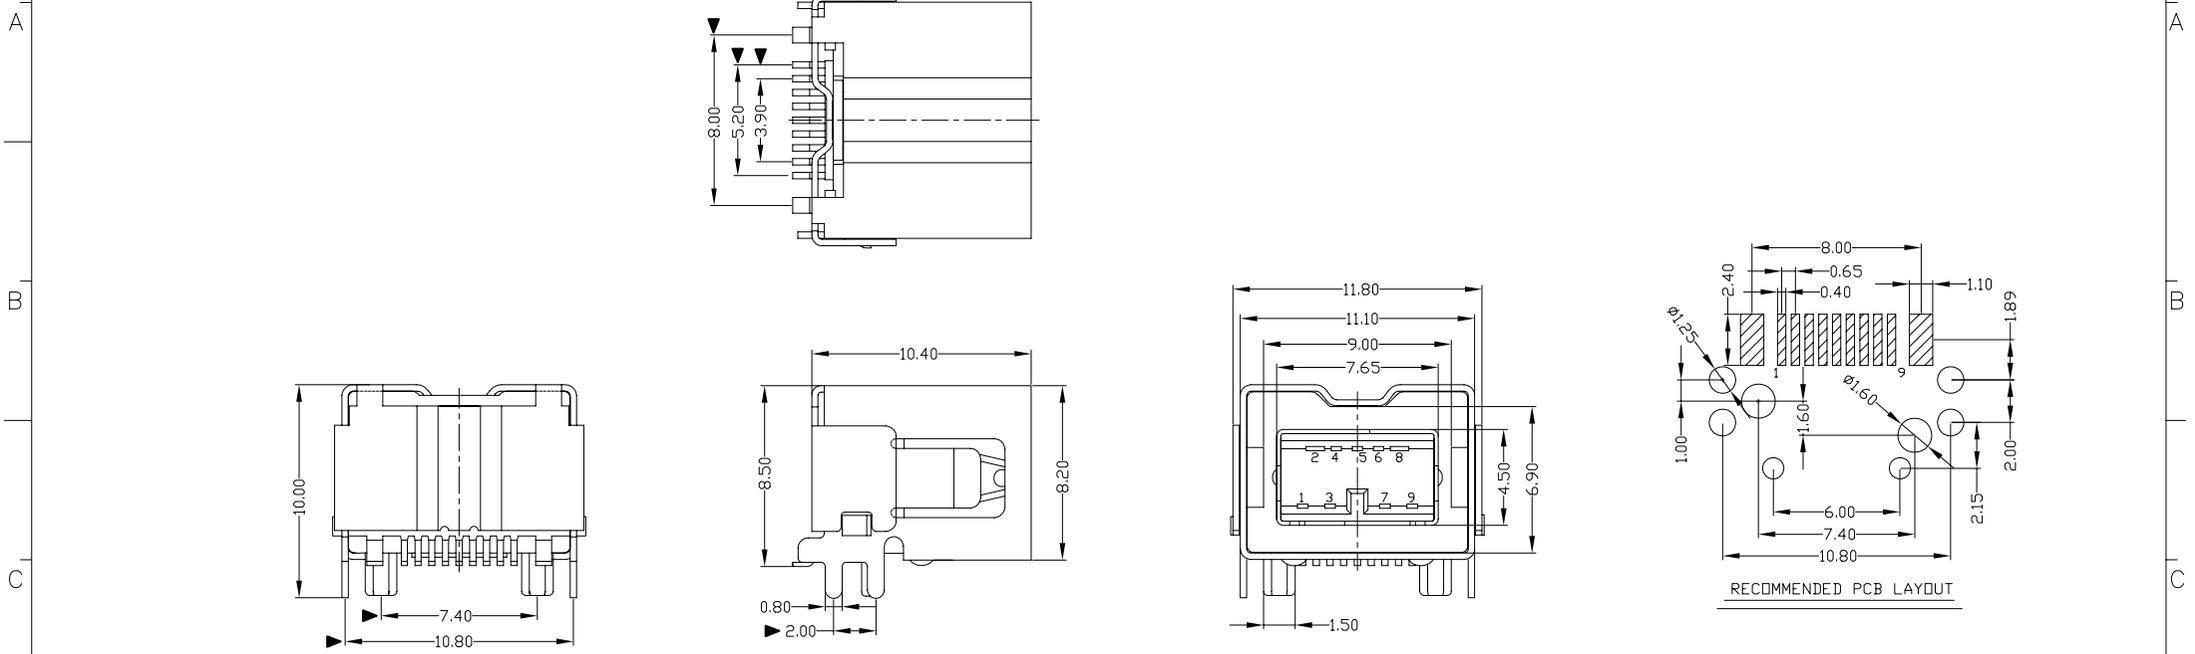

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1AMP,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 50mΩ MAX;
 - WITHSTANDING VOLTAGE: 300V AC;
 - OPERATING TEMPERATURE:-55°C TO +85°C.
 - Mechanical:
 - Mating Force: 30N MAX
 - Unmating Force: 7N MIN.
 - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

IENF-092N-4BH81

2Au 3U'

W:WHITE
B:BLACK

1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市铷高电子制品有限公司						
4	HOUSING	LCP	1	UL94V-0	X. ±0.35	X.' ±2*	MAT'L	TITLE:		PART NO.:			
3	OUTSIDE SHELL	COPPER ALLOY	1	PLATED NICKEL	.X ±0.3	.X' ±1*		SEE NOTE	IEEE 1394 9P/F SMT(斜脚)		IENF-092N-4BH81		
2	INNER SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX*	FINISH	DR:		DWG NO.:			
1	TERMINAL	COPPER ALLOY	9	PLATED GOLD	.XXX ±0.15	.XXX*		SEE NOTE	gan 2012/07/02		AII-H81		
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNTECH INC.		Q'TY	CHKD:	gan 2012/07/02	SCALE	SHEET	REV.	CUSTOMER DRAWING
								APPD:		1:1	1/1	B	