

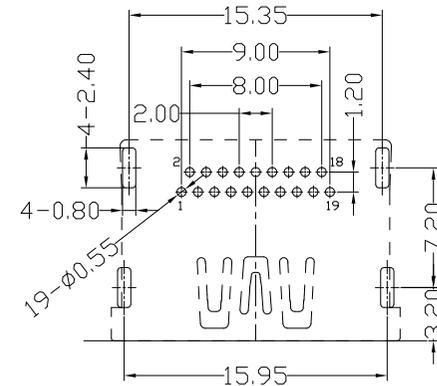








RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.



RECOMMENDED PCB LAYOUT



NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 0.5AMP,30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE:-55°C TO +105°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.



4.PART NO.

- HMAF-19*N-4BRA0
- 1:Au 1U"
 - 5:Au 15U"
 - 6:Au 30U"
 - W:WHITE
 - B:BLACK
 - 1:PBT
 - 2:PA6T
 - 3:PA9T
 - 4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市铨高电子制品有限公司					
3	HOUSING	LCP+30%GF	1	UL94V-0	X. ±0.35	X.' ±2'	MAT'L	TITLE:		PART NO.:		
2	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.X ±0.3	.X' ±1'	SEE NOTE	HDMI AF 19PIN DIP 反向全包式		HMAF-19XN-4BRA0		
1	TERMINAL	COPPER ALLOY	19	PLATED GOLD/TIN	.XX ±0.25	.XX'	FINISH	DR: Ricky 2019/02/14		DWG NO.:		
					.XXX ±0.15	.XXX'	SEE NOTE	CHKD: Ricky 2019/02/14		AII-RA0		
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		Q'TY	APPD:	SCALE	SHEET	REV.	CUSTOMER DRAWING
									1:1	1/1	B	