

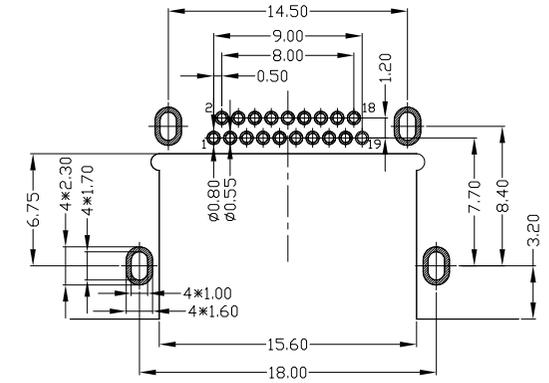
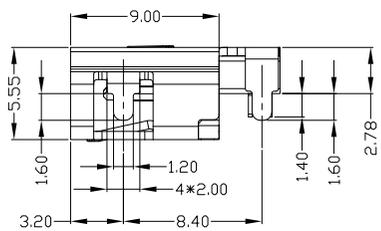
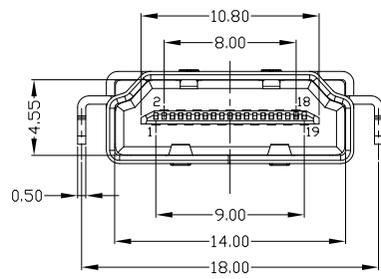





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

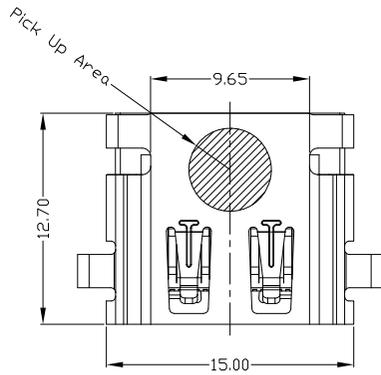

RECOMMENDED PCB LAYOUT T=1.60

GENERAL TOLERANCES: ±0.05

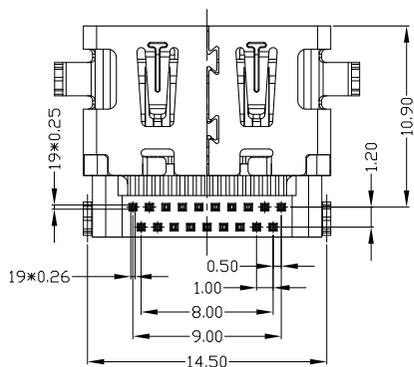

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 0.5AMP,30V AC;
 - INSULATION RESISTANCE: 1000Ω MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE:-55°C TO +105°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.



4.PART NO.

HMAF-191N-4BRS42

- N:Ni
- G:Au
- 1:Au 1U"
- 5:Au 15U"

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	MAT'L	SEE NOTE	FINISH	SEE NOTE	Q'TY	APPD:	SCALE	SHEET	REV.	CUSTOMER DRAWING
3	HOUSING	LCP+30%GF	1	UL94V-0	X. ±0.35	X.' ±2'										
2	SHELL	SPCC	1	PLATED NICKEL	.X ±0.3	.X' ±1'										
1	TERMINAL	COPPER ALLOY	19	PLATED GOLD/TIN	.XX ±0.25	.XX'										
					.XXX ±0.15	.XXX'										
<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.</small>																

TITLE: HDMI AF 19PIN DIP 反向沉板 H2.78
 PART NO.: HMAF-191N-4BRS42
 DR: gan 2017/07/2
 DWG NO.: AII-RS42
 CHKD: gan 2017/07/2
 SCALE: 1:1
 SHEET: 1/1
 REV: B
 CUSTOMER DRAWING