

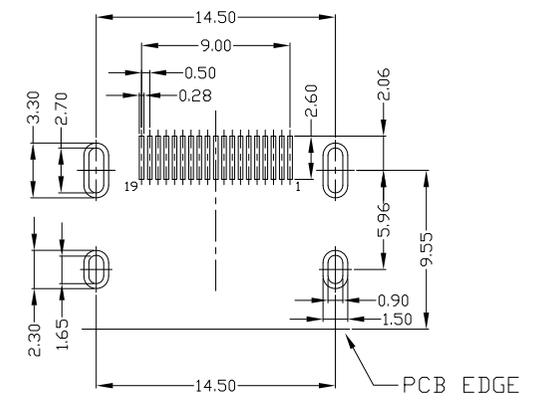

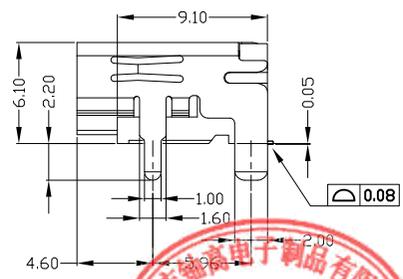





RoHS
Compliant
2002/95/EC

Halogen Free

REV.	ECN.	NO.	APPD.

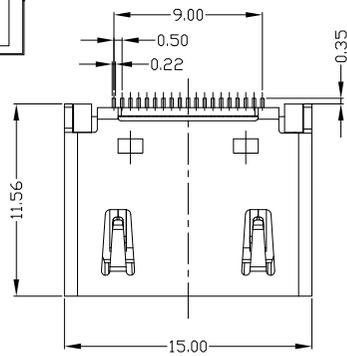

RECOMMENDED PCB LAYOUT (T=1.60mm)



- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 0.5AMP,30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE:-20°C TO +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.
HMAF-191N-4BHS49-S-H
N:Ni
G:Au
1:Au 1U"
5:Au 15U"

Bill of materials:

E	3	HOUSING	LCP+30%GF	1	UL94V-0	X. ±0.35	X.' ±2'	UNITS	东莞市铀高电子制品有限公司 TITLE: HDMI AF 19PIN SMT 铁壳镀镍DIP脚无凸点 L=9.10 前脚1.0宽 无面 PART NO.: HMAF-191N-4BHS49-S-H DR: gan 2017/07/2 DWG NO.: AII-HS49-S-H CHKD: gan 2017/07/2 APPD:
	2	SHELL	SPCC	1	PLATED NICKEL	.X ±0.3	.X' ±1'	mm	
	1	TERMINAL	COPPER ALLOY	19	PLATED GOLD/TIN	.XX ±0.25	.XX'	MAT'L	
	NO	PARTS	MATERIAL	QTY	FINISHING	.XXX ±0.15	.XXX'	SEE NOTE	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.						Q'TY 		SCALE: 1:1 SHEET: 1/1 REV.: B CUSTOMER DRAWING	