

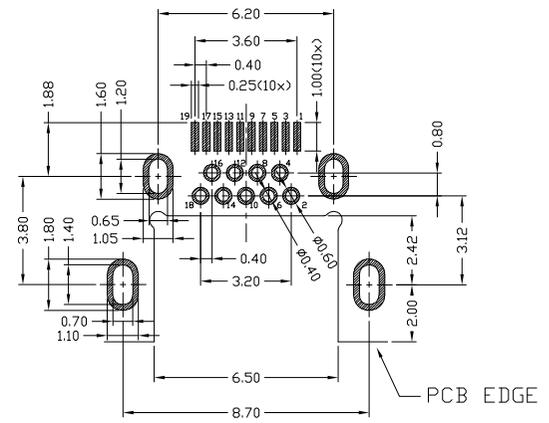







RoHS  
Compliant  
2002/95/EC

REV.	ECN. NO.	APPD.

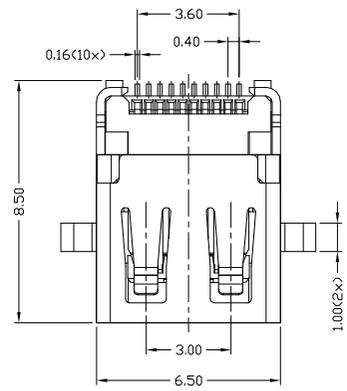

RECOMMENDED PCB LAYOUT(T=0.90mm)  
TOLERANCE UNSPECIFIED ±0.05mm

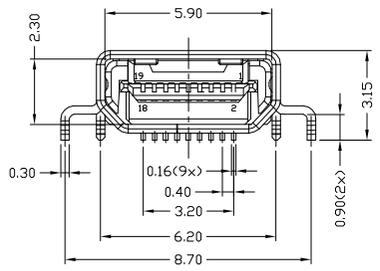

- NOTES:
- ELECTRICAL:
    - VOLTAGE CURRENT RATING: 0.5AMP,30V AC;
    - INSULATION RESISTANCE: 100MΩ MIN;
    - CONTACT RESISTANCE: 30mΩ MAX;
    - WITHSTANDING VOLTAGE: 500V AC;
    - OPERATING TEMPERATURE:-55°C TO +105°C.
  - Mechanical:
    - Mating Force: 35N MAX
    - Unmating Force: 10N MIN.
  - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

HMDF-191N-4BHS40  
N: Ni  
G: Au  
1: Au 1U"  
5: Au 15U"

Bill of materials:

E	3	HOUSING	LCP+30%GF	1	UL94V-0	X. ±0.35	X.' ±2'	UNITS	<b>东莞市铀高电子制品有限公司</b> TITLE: HDMI D TYPE F 沉板 H2.25 前插后贴 PART NO.: HMDF-191N-4BHS40 DR: gan 2017/07/2 DWG NO.: AII-HS40 CHKD: gan 2017/07/2 APPD:	SCALE SHEET REV. CUSTOMER 1:1 1/1 B DRAWING			
	2	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.X ±0.3	.X' ±1'	mm					
	1	TERMINAL	COPPER ALLOY	19	PLATED GOLD/TIN	.XX ±0.25	.XX'	MAT'L					
	NO	PARTS	MATERIAL	QTY	FINISHING	.XXX ±0.15	.XXX'	SEE NOTE					
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.						Q'TY							