





RoHS  
Compliant  
2002/95/EC



REV	LTR	DESCRIPTION	DATE	REVISER	APPD

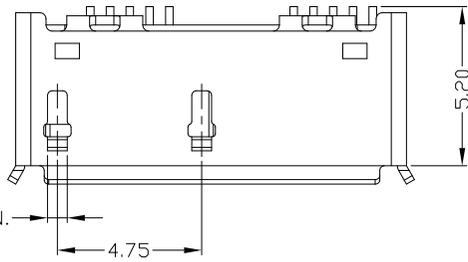


PIN NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	ID
5	GND
6	MICB_SSTX-
7	MICB_SSTX+
8	GND_DRAIN
9	MICB_SSRX-
10	MICB_SSRX+
Shell	Shield

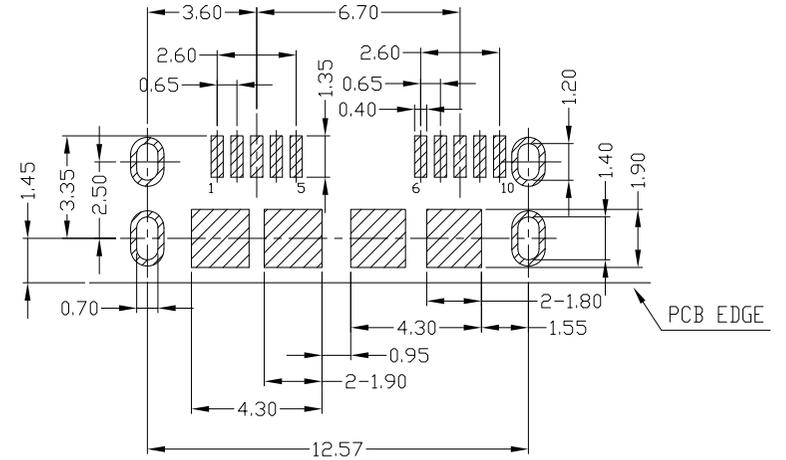

RECOMMENDED P.C.B. LAYOUT

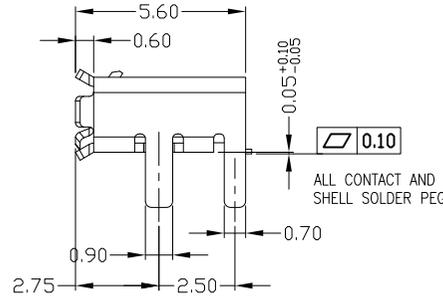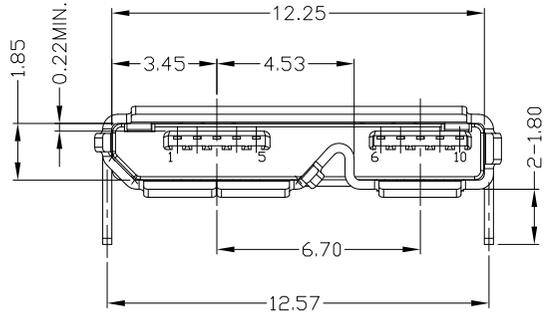

ALL CONTACT AND SHELL SOLDER PEG

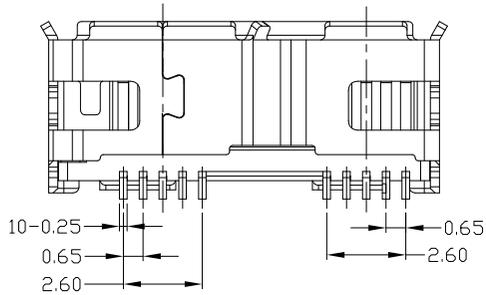

- NOTES:
- ELECTRICAL:
    - VOLTAGE CURRENT RATING: 1AMP, 30V AC;
    - INSULATION RESISTANCE: 100MΩ MIN;
    - CONTACT RESISTANCE: 30mΩ MAX;
    - WITHSTANDING VOLTAGE: 500V AC;
    - OPERATING TEMPERATURE: -40°C TO +85°C.
  - Mechanical:
    - Mating Force: 35N MAX
    - Unmating Force: 10N MIN.
  - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.  
MUYF-10\*N-4BHW09  
1: Au 1U"  
5: Au 15U"  
6: Au 30U"  
W: WHITE  
B: BLACK  
1: PBT  
2: PA6T  
3: PA9T  
4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ±0.35	X.* ±2*	UNITS	mm
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.X ±0.3	.X* ±1*	MAT'L	SEE NOTE
2	HOUSING	LCP+30%GF	1	UL94V-0	.XX ±0.25	.XX*	FINISH	SEE NOTE
1	TERMINAL	COPPER ALLOY	10	PLATED GOLD/TIN	.XXX ±0.15	.XXX*	Q'TY	SEE NOTE
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNTECH INC			APPD:

东莞市铀高电子制品有限公司			
TITLE: MICRO USB 3.0 B TYPE F 外壳四脚插板脚 长1.80MM脚距12.57MM		PART NO.: MUYF-10*N-4BHW09	
DR: gan 2017/08/06		DWG NO.: AII-HW09	
CHKD: gan 2017/08/06		SCALE	SHEET
APPD:		1:1	1/1
		REV.	CUSTOMER DRAWING
		B	