


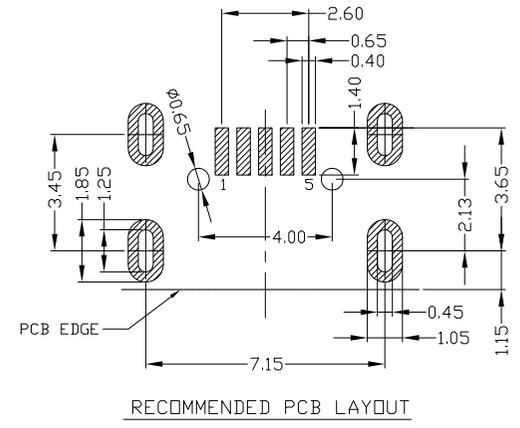

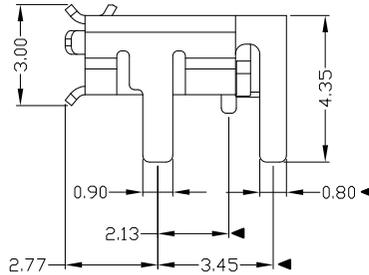




RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

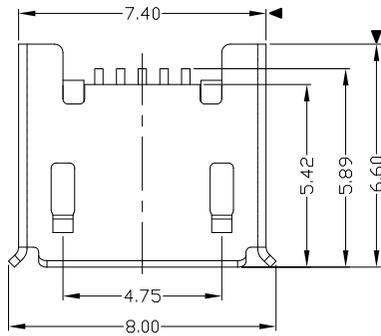

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 50mΩ MAX;
 - WITHSTANDING VOLTAGE: 300V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
 - Mechanical:
 - Mating Force: 30N MAX
 - Unmating Force: 7N MIN.
 - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.


MUYF-05**--4BH806

1:Au 1U' W:WHITE
6:Au 30U' B:BLACK
T:TIN 1:PB
N:NICKEL 2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市铀高电子制品有限公司									
3	HOUSING	LCP+30%GF	1	UL94V-0	X. ±0.35	X.' ±2'	TITLE: MICRO USB B TYPE 5P/F DIP (有柱/四脚2.0)	PART NO.: MUYF-05**--4BH806								
2	SHELL	COPPER ALLOY	1	PLATED TIN/NICKEL	.X ±0.3	.X' ±1'						DR: gan 2013/9/30	DWG NO.: AII-H806			
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD	.XX ±0.25	.XX'						CHKD: gan 2013/9/30				
NO	PARTS	MATERIAL	QTY	FINISHING	.XXX ±0.15	.XXX'	APPD: gan 2013/9/30	SCALE	SHEET	REV.	CUSTOMER DRAWING					

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC



1

2

3

4

5

6

7