

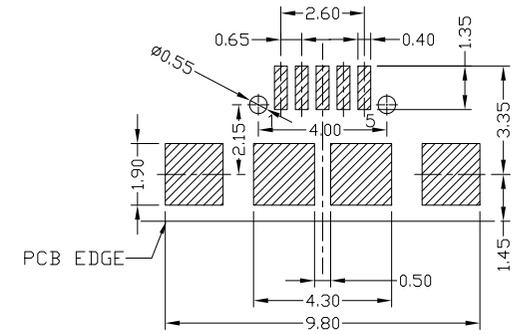
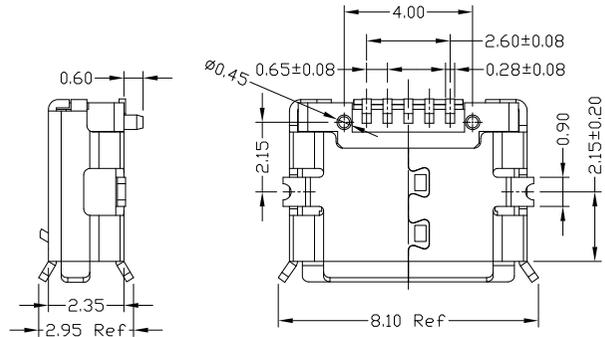






RoHS
Compliant
2002/95/EC

Halogen Free

REV.	ECN. NO.	APPD.

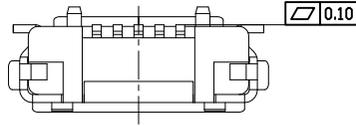

RECOMMENDED PCB LAYOUT

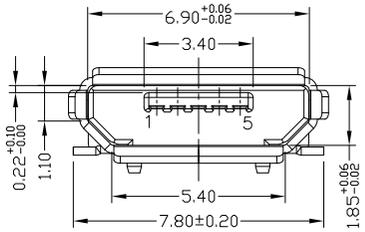

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: PIN1&5 1.8AMP MAX / PIN2&3&4 1AMP MAX. ,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
 - OPERATING TEMPERATURE: -30°C TO +80°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUYF-05*T-4BHUA014

- 1:Au 1U"
6:Au 30U"
T:TIN
N:NICKEL
- W:WHITE
B:BLACK
1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市铀高电子制品有限公司						
3	SHELL	COPPER ALLOY	1	PLATED TIN	X. ±0.35	X.' ±2'	MAT'L	TITLE: MICRO USB B TYPE F 5P SMT 有脚柱		PART NO.: MUYF-05*T-4BHUA014			
2	HOUSING	LCP+30%.GF	1	UL94V-0	.X ±0.30	.X' ±1'	SEE NOTE	DR: Ricky 2018/5/8		DWG NO.: AII-HUA014			
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD	.XX ±0.25	.XX'	FINISH	CHKD: Ricky 2018/5/8		SCALE SHEET REV. CUSTOMER DRAWING			
					.XXX ±0.15	.XXX'	SEE NOTE	APPD:		5:1	1/1	A	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNDTECH AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNDTECH INC

