

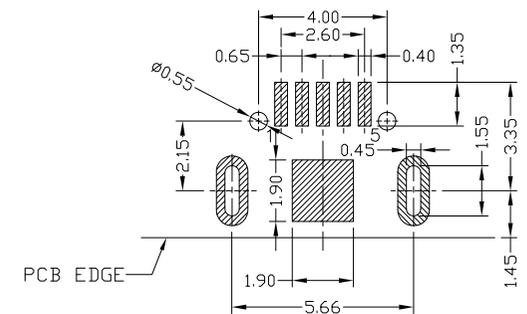
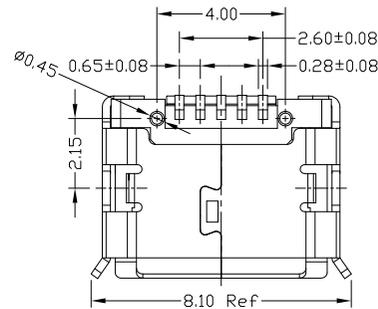






RoHS  
Compliant  
2002/95/EC

Halogen Free

REV.	ECN.	NO.	APPD.



RECOMMENDED PCB LAYOUT

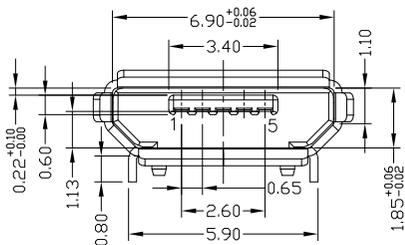

NOTES:

1.ELECTRICAL:

- 1)VOLTAGE CURRENT RATING:PIN1&5 1.8AMP MAX
- 2)INSULATION RESISTANCE: 100MΩ MIN;
- 3)CONTACT RESISTANCE: 30mΩ MAX;
- 4)WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
- 5)OPERATING TEMPERATURE:-30°C TO +80°C.

2.Mechanical:

- 1)Mating Force: 35N MAX
  - 2)Unmating Force: 10N MIN.
- 3.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.



4.PART NO.

MUYF-05\*T-4BHUA029

- 1:Au 1U"
- 6:Au 30U"
- T:TIN
- N:NICKEL
- W:WHITE
- B:BLACK
- 1:PBT
- 2:PA6T
- 3:PA9T
- 4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市铀高电子制品有限公司				
3	SHELL	COPPER ALLOY	1	PLATED TIN	X. ±0.35	X.' ±2'	SEE NOTE	TITLE: MICRO USB B TYPE F 5P 插板5.9脚长0.8有脚柱		PART NO.: MUYF-05*T-4BHUA029	
2	HOUSING	LCP+30%GF	1	UL94V-0	.X ±0.30	.X' ±1'		DR: Ricky 2018/5/14		DWG NO.: AII-HUA029	
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD	.XX ±0.25	.XX'		CHKD: Ricky 2018/5/14		SCALE SHEET REV. CUSTOMER 5:1 1/1 A DRAWING	
NO	PARTS	MATERIAL	QTY	FINISHING	.XXX ±0.15	.XXX'	SEE NOTE	APPD:			

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC

