

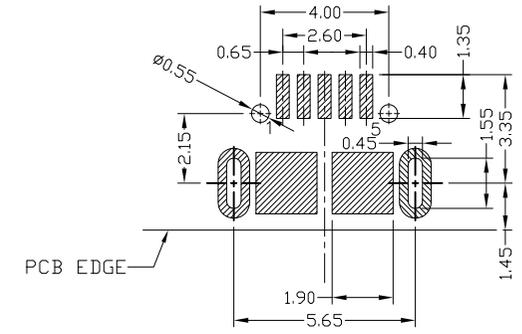
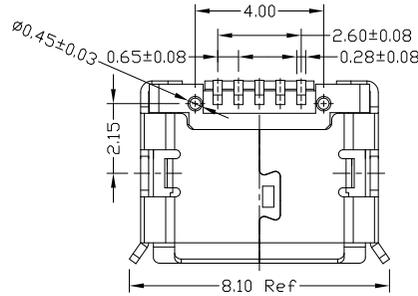






RoHS  
Compliant  
2002/95/EC

Halogen Free

REV.	ECN.	NO.	APPD.



RECOMMENDED PCB LAYOUT

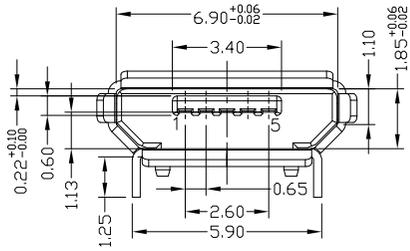

NOTES:

- 1.ELECTRICAL:  
 1)VOLTAGE CURRENT RATING:PIN1&5 1.8AMP MAX  
 2)PIN2&3&4 1AMP MAX. ,30V AC;  
 3)INSULATION RESISTANCE: 100MΩ MIN;  
 4)CONTACT RESISTANCE: 30mΩ MAX;  
 5)WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.  
 6)OPERATING TEMPERATURE:-30°C TO +80°C.
- 2.Mechanical:  
 1)Mating Force: 35N MAX  
 2)Unmating Force: 10N MIN.
- 3.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUYF-05\*T-4BHUA039

- 1:Au 1U"  
 6:Au 30U"  
 T:TIN  
 N:NICKEL
- W:WHITE  
 B:BLACK  
 1:PBT  
 2:PA6T  
 3:PA9T  
 4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
3	SHELL	COPPER ALLOY	1	PLATED TIN
2	HOUSING	LCP+30%GF	1	UL94V-0
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD
NO	PARTS	MATERIAL	QTY	FINISHING

X.	X.*	UNITS
±0.35	±2°	mm
±0.30	±1°	MAT'L
.XX ±0.25	.XX°	SEE NOTE
.XXX ±0.15	.XXX°	FINISH
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNDTECH AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNDTECH INC		SEE NOTE
Q'TY		SEE NOTE

东莞市铀高电子制品有限公司

TITLE: MICRO USB B TYPE F 5P 插板5.9脚长1.25有柱	PART NO.: MUYF-05*T-4BHUA039
DR: Ricky 2018/5/14	DWG NO.: AII-HUA039
CHKD: Ricky 2018/5/14	SCALE SHEET REV. CUSTOMER 5:1 1/1 A DRAWING
APPD:	