

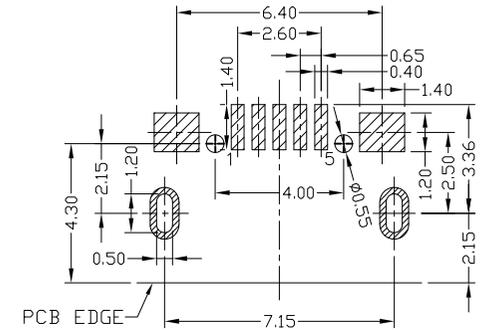







RoHS
Compliant
2002/95/EC

Halogen Free

REV.	ECN. NO.	APPD.

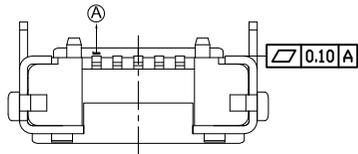

RECOMMENDED PCB LAYOUT

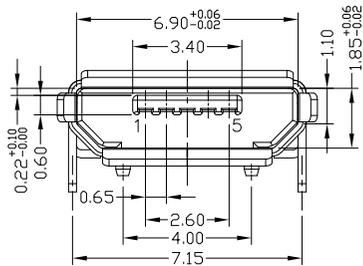

NOTES:

1. ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING: PIN1&5 1.8AMP MAX, PIN2&3&4 1AMP MAX., 30V AC;
 - 2) INSULATION RESISTANCE: 100MΩ MIN;
 - 3) CONTACT RESISTANCE: 30mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
 - 5) OPERATING TEMPERATURE: -30°C TO +80°C.
2. Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Unmating Force: 10N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.



4. PART NO.

MUYF-05*T-4BHUA045

- | | |
|------------|----------|
| 1: Au 1U* | W: WHITE |
| 6: Au 30U* | B: BLACK |
| T: TIN | 1: PBT |
| N: NICKEL | 2: PA6T |
| | 3: PA9T |
| | 4: LCP |

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市铀高电子制品有限公司					
3	SHELL	STAINLESS STEEL	1	PLATED TIN	X. ±0.35	X.' ±2'	SEE NOTE	TITLE: MICRO USB B TYPE F 5P 插板7.2 有导位有柱 外壳加焊盘脚长1.1		PART NO.: MUYF-05XT-4BHUA045		
2	HOUSING	LCP+30%GF	1	UL94V-0	.X ±0.30	.X' ±1'						
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD	.XX ±0.25	.XX'		DR: Ricky 2018/9/11	DWG NO.: AII-HUA045			
					.XXX ±0.15	.XXX'	SEE NOTE	CHKD: Ricky 2018/9/11	SCALE	SHEET	REV.	CUSTOMER
							Q'TY	APPD:	5:1	1/1	A	DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNDTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNDTECH INC

