

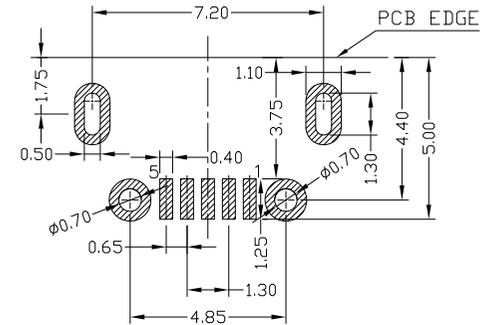


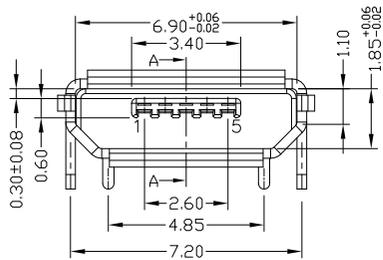





RoHS  
Compliant  
2002/95/EC

Halogen Free


REV.	ECN.	NO.	APPD.



RECOMMENDED PCB LAYOUT



不锈钢双触点




铜壳单触点



1. ELECTRICAL:
- VOLTAGE CURRENT RATING: PIN1&5 1.8AMP MAX / PIN2&3&4 1AMP MAX., 30V AC;
  - INSULATION RESISTANCE: 100MΩ MIN;
  - CONTACT RESISTANCE: 30mΩ MAX;
  - WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
  - OPERATING TEMPERATURE: -30°C TO +80°C.
2. Mechanical:
- Mating Force: 35N MAX
  - Unmating Force: 10N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.


MUYF-05\*T-4BHUA067



Bill of materials:

3	SHELL	STAINLESS STEEL	1	PLATED TIN	X. ±0.35	X.* ±2*	UNITS	mm
2	HOUSING	LCP+30%.GF	1	UL94V-0	.X ±0.30	.X* ±1*	MAT'L	
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD	.XX ±0.25	.XX*	SEE NOTE	
NO	PARTS	MATERIAL	QTY	FINISHING	.XXX ±0.15	.XXX*	FINISH	
							SEE NOTE	
							Q'TY	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INDDTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INDDTECH INC



东莞市铀高电子制品有限公司

TITLE:	MICRO USB B TYPE F 5P 四脚全插牛角型短针	PART NO.:	MUYF-05XT-4BHUA067
DR:	Ricky 2018/9/4	DWG NO.:	AII-HUA067
CHKD:	Ricky 2018/9/4	SCALE	5:1
APPD:		SHEET	1/1
		REV.	A
		CUSTOMER DRAWING	