

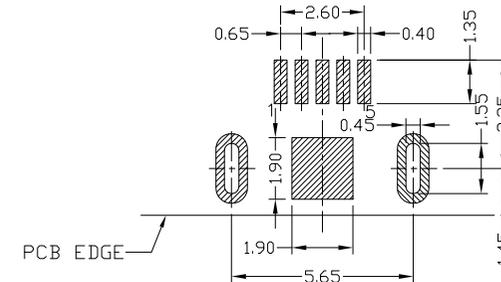







RoHS
Compliant
2002/95/EC

Halogen Free

REV.	ECN.	NO.	APPD.



RECOMMENDED PCB LAYOUT

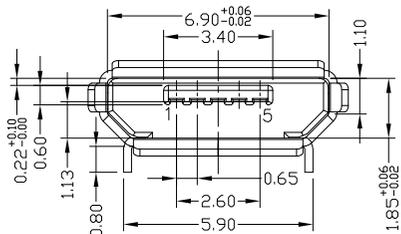

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: PIN1&5 1.8AMP MAX / PIN2&3&4 1AMP MAX. ,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
 - OPERATING TEMPERATURE: -30°C TO +80°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.



4.PART NO.

MUYF-05*T-4BHUA142
 1: Au 1U*
 6: Au 30U*
 T: TIN
 N: NICKEL
 W: WHITE
 B: BLACK
 1: PBT
 2: PA6T
 3: PA9T
 4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
3	SHELL	COPPER ALLOY	1	PLATED TIN
2	HOUSING	LCP+30%GF	1	UL94V-0
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD
NO	PARTS	MATERIAL	QTY	FINISHING

UNITS	mm
X. ±0.35	X.* ±2*
.X ±0.30	.X* ±1*
.XX ±0.25	.XX*
.XXX ±0.15	.XXX*
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INDDTECH AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INDDTECH INC	
Q'TY	

东莞市铀高电子制品有限公司			
TITLE: MICRO USB B TYPE F 5P 插板5.9脚长0.8无柱	PART NO.: MUYF-05XT-4BHUA142		
DR: Ricky 2018/9/7	DWG NO.: AII-HUA142		
CHKD: Ricky 2018/9/7	SCALE: 5:1	SHEET: 1/1	REV. A
APPD:	CUSTOMER DRAWING		