

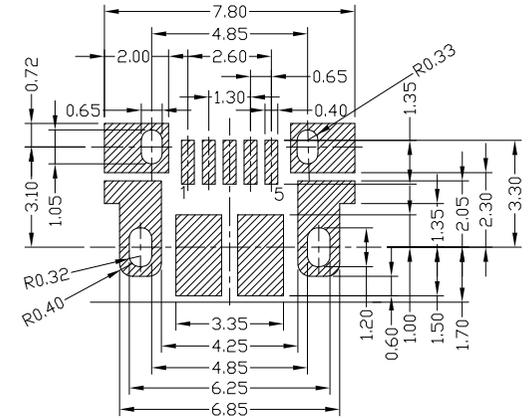








RoHS Compliant
2002/95/EC

Halogen Free


REV.	ECN. NO.	APPD.



RECOMMENDED PCB PATTERN
Tolerance:±0.05

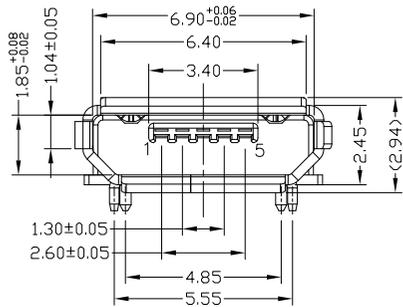

(INSIDE INTERSECTION)

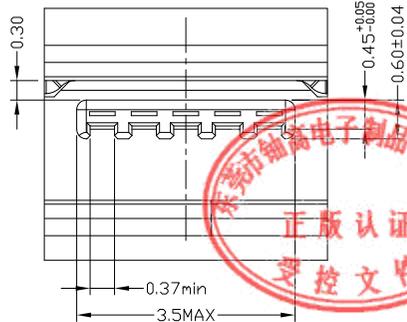

CONTACT AREA DETAIL VIEW

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: PIN1&5 1.8AMP MAX / PIN2&3&4 1AMP MAX. ,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
 - OPERATING TEMPERATURE: -30°C TO +80°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUYF-05*T-4BHUA167

- 1: Au 1U"
- 6: Au 30U"
- T: TIN
- N: NICKEL
- W: WHITE
- B: BLACK
- 1: PBT
- 2: PA6T
- 3: PA9T
- 4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市铀高电子制品有限公司					
3	SHELL	STAINLESS STEEL	1	PLATED TIN	X. ±0.35	X.' ±2'	MAT'L	TITLE:	MICRO USB B TYPE F 5P 牛角型斜后盖插板5.55			
2	HOUSING	LCP+30%.GF	1	UL94V-0	.X ±0.30	.X' ±1'	SEE NOTE	DR:	Ricky 2018/4/30			
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD	.XX ±0.25	.XX'	FINISH	CHKD:	Ricky 2018/4/30			
					.XXX ±0.15	.XXX'	SEE NOTE	APPD:	Ricky 2018/4/30			
							Q'TY	SCALE	SHEET	REV.	CUSTOMER DRAWING	
								4:1	1/1	A		

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INDTCHING AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INDTCH INC

