


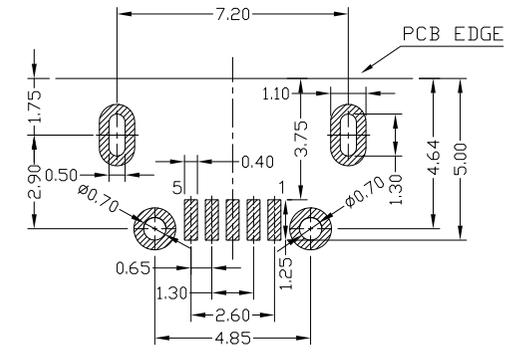




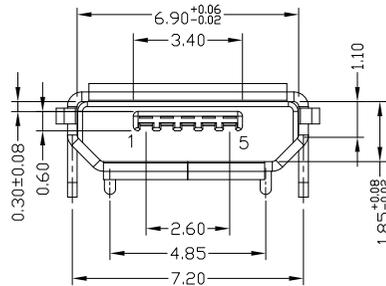

RoHS
Compliant
2002/95/EC

Halogen Free

REV.	ECN.	NO.	APPD.




NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: PIN1&5 1.8AMP MAX, PIN2&3&4 1AMP MAX, 30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
 - OPERATING TEMPERATURE: -30°C TO +80°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUYF-05*T-4BHUA409



Bill of materials:

E	3	SHELL	STAINLESS STEEL / COPPER ALLOY	1	PLATED TIN	X. ±0.35	X.' ±2'	UNITS	mm	东莞市铀高电子制品有限公司
	2	HOUSING	LCP+30%.GF	1	UL94V-0	.X ±0.30	.X' ±1'	MAT'L	SEE NOTE	
	1	TERMINAL	COPPER ALLOY	5	PLATED GOLD	.XX ±0.25	.XX'	FINISH	SEE NOTE	
	NO	PARTS	MATERIAL	QTY	FINISHING	.XXX ±0.15	.XXX'	Q'TY	SEE NOTE	
<p>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INDDTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INDDTECH INC</p>										
<p>DR: <i>Ricky</i> 2018/4/30 CHKD: <i>Ricky</i> 2018/4/30 APPD:</p>									<p>TITLE: MIRCO USB B TYPE F 5P 四脚全插牛角短斜后盖0.8版</p> <p>PART NO.: MUYF-05*T-4BHUA409</p> <p>DWG NO.: AII-HUA409</p> <p>SCALE: 5:1 SHEET: 1/1 REV.: A CUSTOMER DRAWING</p>	