

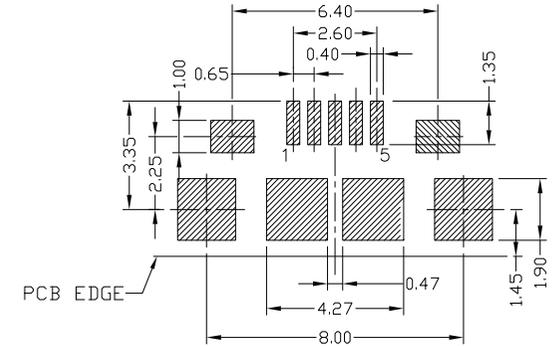
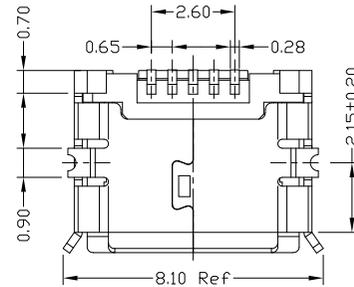



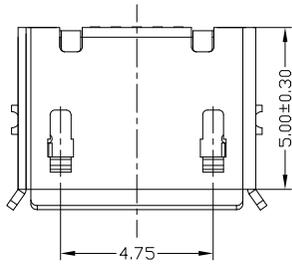


RoHS  
Compliant  
2002/95/EC

Halogen Free

REV.	ECN. NO.	APPD.

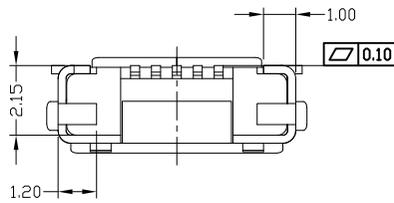

RECOMMENDED PCB LAYOUT

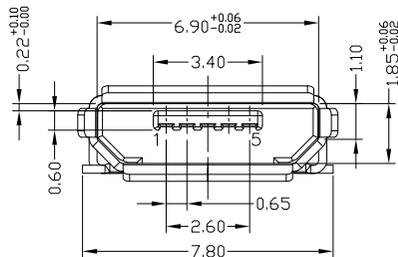

NOTES:

1.ELECTRICAL:

- 1)VOLTAGE CURRENT RATING:PIN1&5 1.8AMP MAX
- 2) PIN2&3&4 1AMP MAX. ,30V AC;
- 3)INSULATION RESISTANCE: 100MΩ MIN;
- 4)CONTACT RESISTANCE: 30mΩ MAX;
- 5)WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
- 6)OPERATING TEMPERATURE:-30°C TO +80°C.

2.Mechanical:

- 1)Mating Force: 35N MAX
- 2)Unmating Force: 10N MIN.
- 3.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.



4.PART NO.

MUYF-05\*T-4BHUA489

1:Au 1U"  
6:Au 30U"  
T:TIN  
N:NICKEL

W:WHITE  
B:BLACK  
1:PBT  
2:PA6T  
3:PA9T  
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市铀高电子制品有限公司						
3	SHELL	COPPER ALLOY / STAINLESS STEEL	1	PLATED TIN	X. ±0.35	X.* ±2*	MAT'L	TITLE: MICRO USB B TYPE F 5P SMT 有焊脚无柱		PART NO.: MUYF-05*T-4BHUA489			
2	HOUSING	LCP+30%.GF	1	UL94V-0	.X ±0.30	.X* ±1*	SEE NOTE	DR: Ricky 2018/5/9		DWG NO.: AII-HUA489			
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD	.XX ±0.25	.XX*	FINISH	CHKD: Ricky 2018/5/9		SCALE SHEET REV. CUSTOMER DRAWING			
					.XXX ±0.15	.XXX*	SEE NOTE	APPD:		5:1	1/1	A	
<p>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC</p>							Q'TY						