

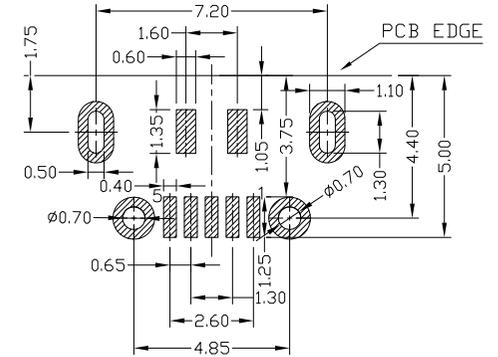




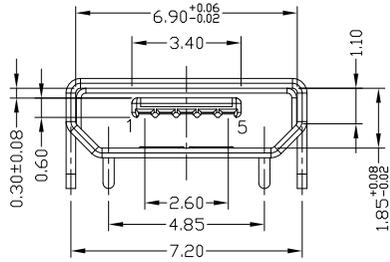


RoHS
Compliant
2002/95/EC

Halogen Free

REV.	ECN.	NO.	APPD.



RECOMMENDED PCB LAYOUT



NOTES:

- 1.ELECTRICAL:
 - 1)VOLTAGE CURRENT RATING:PIN1&5 1.8AMP MAX / PIN2&3&4 1AMP MAX. ,30V AC;
 - 2)INSULATION RESISTANCE: 100MΩ MIN;
 - 3)CONTACT RESISTANCE: 30mΩ MAX;
 - 4)WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
 - 5)OPERATING TEMPERATURE:-30°C TO +80°C.
- 2.Mechanical:
 - 1)Mating Force: 35N MAX
 - 2)Unmating Force: 10N MIN.
- 3.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.



4.PART NO.

MUYF-05*T-4BHUA533

- 1:Au 1U"
6:Au 30U"
T:TIN
N:NICKEL
- W:WHITE
B:BLACK
1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市铀高电子制品有限公司				
4	SHELL	STAINLESS STEEL	1		X. ±0.35	X.' ±2'	MAT'L	TITLE: MICRO USB B TYPE F 5P 四脚全插牛角型短针带钢片无导线		PART NO.: MUYF-05*T-4BHUA533	
3	SHELL	COPPER ALLOY	1	PLATED TIN	.X ±0.30	.X' ±1'	SEE NOTE	DR: Ricky 2018/5/2		DWG NO.: AII-HUA533	
2	HOUSING	LCP+30%GF	1	UL94V-0	.XX ±0.25	.XX'	FINISH	CHKD: Ricky 2018/5/2		SCALE SHEET REV. CUSTOMER	
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD	.XXX ±0.15	.XXX'	SEE NOTE	APPD:		5:1 1/1 A DRAWING	
					<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNTECH INC</small>						