


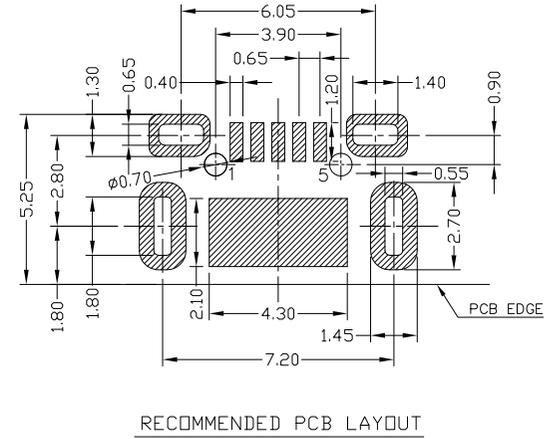






RoHS
Compliant
2002/95/EC

Halogen Free

REV.	ECN.	NO.	APPD.



NOTES:

1.ELECTRICAL:

- 1)VOLTAGE CURRENT RATING: PIN1&5 1.8AMP MAX / PIN2&3&4 1AMP MAX. ,30V AC;
- 2)INSULATION RESISTANCE: 100MΩ MIN;
- 3)CONTACT RESISTANCE: 30mΩ MAX;
- 4)WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
- 5)OPERATING TEMPERATURE: -30°C TO +80°C.

2.Mechanical:

- 1)Mating Force: 35N MAX
 - 2)Unmating Force: 10N MIN.
- 3.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.



4.PART NO.

MUYF-05*T-4BHUA684

1:Au 1U"
6:Au 30U"
T:TIN
N:NICKEL

W:WHITE
B:BLACK
1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市铀高电子制品有限公司				
3	SHELL	STAINLESS STEEL	1	PLATED TIN	X. ±0.35	X.* ±2*	MAT'L	TITLE: MICRO USB B TYPE F 5P 牛角型全插 6.05 7.2有柱短针新模0.8版主体升级 PART NO.: MUYF-05*T-4BHUA684 DR: Ricky 2018/5/2 DWG NO.: AII-HUA684 CHKD: Ricky 2018/5/2 APPD:			
2	HOUSING	LCP+30%GF	1	UL94V-0	.X ±0.30	.X* ±1*	SEE NOTE				
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD	.XX ±0.25	.XX*	SEE NOTE				
					.XXX ±0.15	.XXX*	SEE NOTE				
							Q'TY				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNDTECH AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNDTECH INC								SCALE	SHEET	REV.	CUSTOMER DRAWING
								5:1	1/1	A	