



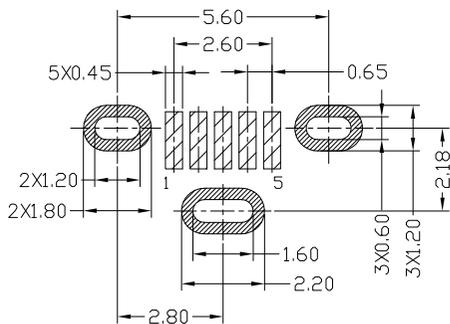

RoHS
Compliant
2002/95/EC





REV	LTR	DESCRIPTION	DATE	REVISER	APPD

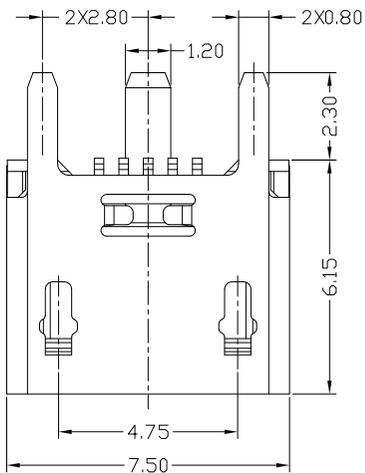

RECOMMENDED PCB LAYOUT(TOP VIEW)
GENERAL TOLERANCES:±0.05

PIN	NAME
5	GND
4	ID
3	D+
2	D-
1	VBUS

PIN ASSIGNMENT

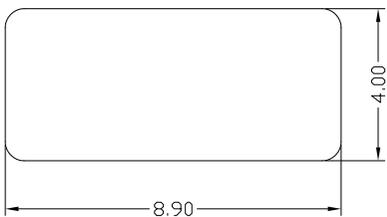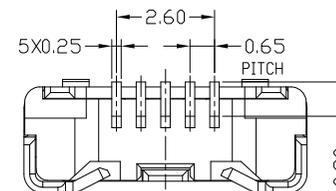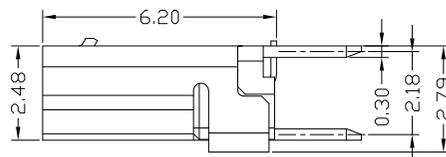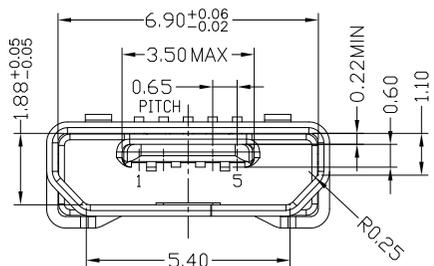


CAP DIMENSION SKETCH MAP

NOTES:

- 1) ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING:PIN1&5 1.8AMP MAX / PIN2&3&4 0.5AMP MAX. ,30V AC;
 - 2) INSULATION RESISTANCE: 100MΩ MIN;
 - 3) CONTACT RESISTANCE: 30mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
 - 5) OPERATING TEMPERATURE:-30°C TO +80°C.
- 2) Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Unmating Force: 8N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

MUYF-05*N-4BQS21



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
5				X.X ±0.30 X.' ±10'
4	CAP	LCP+30%GF	1	UL94V-0 .XX ±0.20 .X' ±8'
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL .XXX ±0.10 .XX' ±5'
2	CONTACT	COPPER ALLOY	5	PLATED GOLD
1	HOUSING	LCP+30%GF	1	UL94V-0

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS mm				
东莞市铀高电子制品有限公司				
TITLE: MICRO USB B TYPE F 5P 180度 SMT 无翻边外壳3支脚		PART NO.: MUYF-05XN-4BQS21		
DR: Ricky 2019/08/13		DWG NO.: AII-QS21		
CHKD: Ricky 2019/08/13		SCALE	SHEET	REV.
APPD:		1:1	1/1	B
		CUSTOMER DRAWING		

