

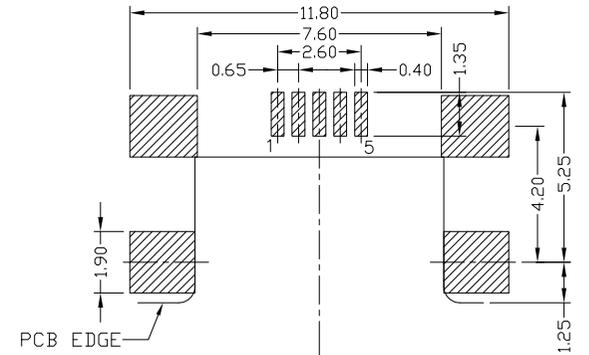
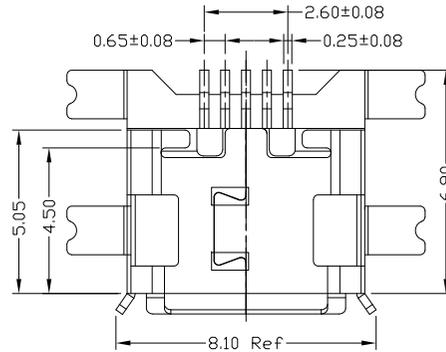



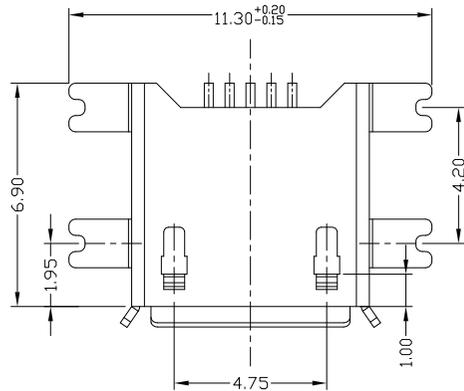


RoHS
Compliant
2002/95/EC

Halogen Free

REV.	ECN. NO.	APPD.

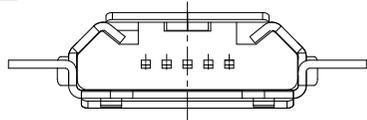

RECOMMENDED PCB LAYOUT

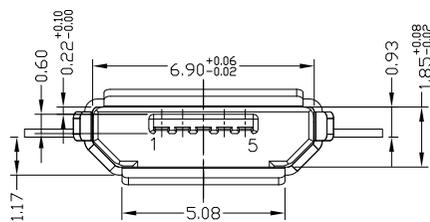

NOTES:

1.ELECTRICAL:


- 1)VOLTAGE CURRENT RATING:PIN1&5 1.8AMP MAX
- 2)PIN2&3&4 1AMP MAX. ,30V AC;
- 3)INSULATION RESISTANCE: 100MΩ MIN;
- 4)CONTACT RESISTANCE: 30mΩ MAX;
- 5)WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
- 5)OPERATING TEMPERATURE:-30°C TO +80°C.

2.Mechanical:

- 1)Mating Force: 35N MAX
 - 2)Unmating Force: 10N MIN.
- 3.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUYF-05*T-4BHUA059



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
3	SHELL	COPPER ALLOY	1	PLATED TIN
2	HOUSING	LCP+30%GF	1	UL94V-0
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD

X. ±0.35	X.* ±2*	UNITS	mm
.X ±0.30	.X* ±1*	MAT'L	SEE NOTE
.XX ±0.25	.XX*	FINISH	SEE NOTE
.XXX ±0.15	.XXX*	Q'TY	SEE NOTE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNDTECHING AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNDTECH INC

东莞市铰高电子制品有限公司

TITLE: MICRO USB B TYPE F 5P SMT 破板式1.17 四脚全贴	PART NO.: MUYF-05*T-4BHUA059
DR: Ricky 2018/5/10	DWG NO.: AII-HUA059
CHKD: Ricky 2018/5/10	SCALE SHEET REV. CUSTOMER DRAWING
APPD:	5:1 1/1 A