

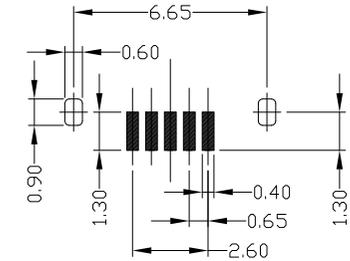
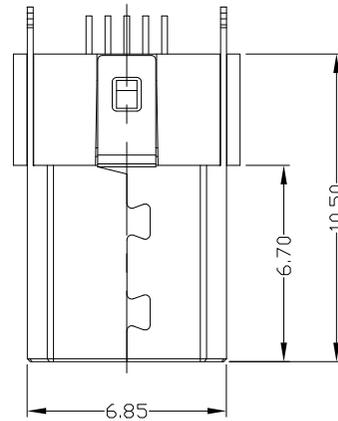
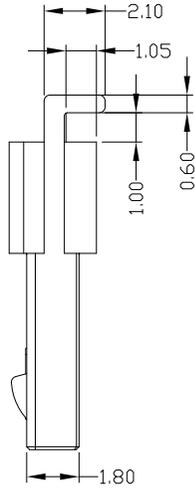


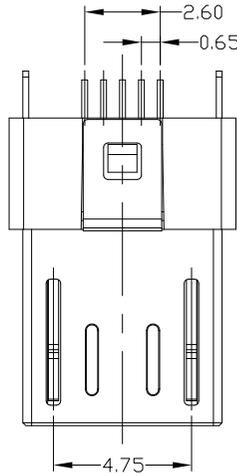


RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.



RECOMMENDED PCB LAYOUT

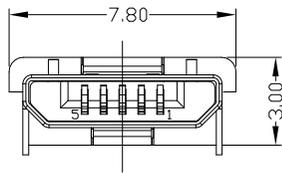

- NOTES:  
 1) ELECTRICAL:  
 1) VOLTAGE CURRENT RATING: 1.5AMP,250V AC;  
 2) INSULATION RESISTANCE: 1000MΩ MIN;  
 3) CONTACT RESISTANCE: 30mΩ MAX;  
 4) WITHSTANDING VOLTAGE: 500V AC;  
 5) OPERATING TEMPERATURE:-20°C TO +85°C.  
 2. Mechanical:  
 1) Mating Force: 35N MAX.  
 2) Unmating Force: 10N MIN.  
 3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

MUYM-05\*N-4BVH10  
 1:W/WHITE  
 2:W/BLACK  
 1:PAUT  
 2:PAUT  
 3:PAUT  
 4:LCP  
 1Au 1U\*  
 6Au 30U\*

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市铀高电子制品有限公司						
4	HOOK	STAINLESS STEEL	2		X. ±0.3	X.* ±2*	MAT'L	TITLE:		PART NO.:			
3	HOUSING	LCP+30%GF	1		.X ±0.2	.X* ±1*		SEE NOTE	MICRO USB 5P BM 超薄插头		MUYM-05*N-4BVH10		
2	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XX ±0.15	.XX*	FINISH	DR: <i>Ricky</i> 2014/04/23		DWG NO.:			
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	.XXX ±0.10	.XXX*	SEE NOTE	CHKD: <i>Ricky</i> 2014/04/23		AII-VH10			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.							Q'TY	APPD:		SCALE	SHEET	REV.	CUSTOMER DRAWING
										1:1	1/1	B	